


Podatkovni list izdelka: IL146542-A

Metering insert 5-42G compl. 10 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

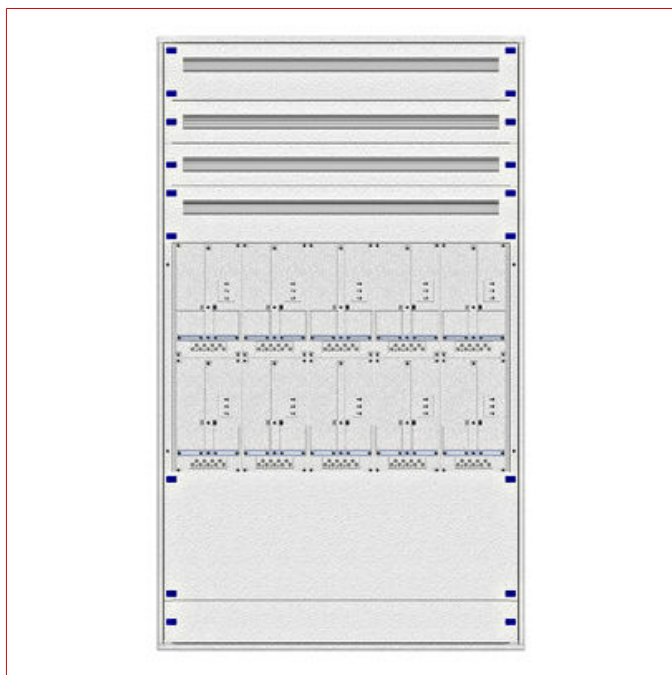

Tehnični podatki

neto širina (mm)	1.140,00
neto višina (mm)	1.935,00
neto globina (mm)	150,00
EAN-koda	9004840961836
tip	vložek za števecni razdelilnik
pokrajina	Dunaj
vgradne komponente	čelna plošča, jeklo
barva	RAL 7035
širina števca	5
višinska enota (HE)	42
število števecv v vrsti	2
števčna mesta	10
predštevčne vrste	6
material čelne plošče	jeklena pločevina
Osnovni opis	vložek
širinskih enot	342

Tabela izdelkov

Opis	Teža bakra (kg/km)	Šifra
Metering insert 5-42G compl. 10 cou. pl. front pl. st. Wien Frontblende Stahlblech, komplett		IL146542-A
dodatni pribor		
Komplet, ozemljitveni, 300mm/Yf 6mm ² predpripravljen, z vijaki		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824