


Podatkovni list izdelka: IL146539-A

# Metering insert 5-39G compl. 10 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

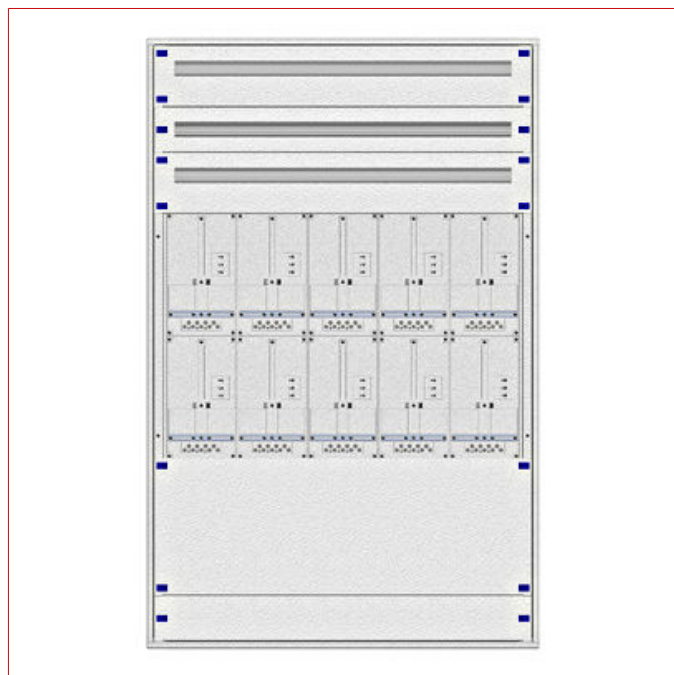

## Tehnični podatki

|                         |                                |
|-------------------------|--------------------------------|
| neto širina (mm)        | 1.140,00                       |
| neto višina (mm)        | 1.795,00                       |
| neto globina (mm)       | 150,00                         |
| EAN-koda                | 9004840961829                  |
| tip                     | vložek za števecni razdelilnik |
| pokrajina               | Dunaj                          |
| vgradne komponente      | čelna plošča, jeklo            |
| barva                   | RAL 7035                       |
| širina števca           | 5                              |
| višinska enota (HE)     | 39                             |
| število števecv v vrsti | 2                              |
| števčna mesta           | 10                             |
| predštevčne vrste       | 5                              |
| material čelne plošče   | jeklena pločevina              |
| Osnovni opis            | vložek                         |
| širinskih enot          | 285                            |



## Tabela izdelkov

| Opis                                                                                                                                                                                                                                                                                                                                                           | Teža bakra (kg/km) | Šifra      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Metering insert 5-39G compl. 10 cou. pl. front pl. st. Wien<br>Frontblende Stahlblech, komplett                                                                                                                                                                                                                                                                |                    | IL146539-A |
| <b>dodatni pribor</b>                                                                                                                                                                                                                                                                                                                                          |                    |            |
| Komplet, ozemljitveni, 300mm/Yf 6mm <sup>2</sup> predpripravljeni, z vijaki                                                                                                                                                                                                                                                                                    |                    | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019                |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |