

Podatkovni list izdelka: INSNK023--

N-kontakt za 3-polna stikala INSE, 100-125A

Zaskočna pritrditev N-kontakta za naknadno predelavo 3-polnega stikala na 4-polno stikalo. Uporablja se lahko samo s stikali 100-125A INSE. Ni primerno za uporabo z INSR, INSP in INSA!




Tehnični podatki

izvedba	pribor
nazivni tok (A)	125
poli	1
montaža	nadgradna montaža
standard	IEC 60947, EN 60947, VDE 0668
naznačena izolacijska napetost [Ui] (V)	690
naznačena impulzna zdržna napetost [Uimp] (V)	6000
naznačeni kratkotrajni zdržni tok I _{cw}	1000
naznačeni kratkostični tok	10kA @ 440V / 6kA @ 690V
Short-circuit protection maximum fuse	125
frekvenca (Hz)	50/60
izklopni pogoji (obratovalni tok)	AC-23A - 400V - 84A AC-3 - 400V - 70A AC-23A - 690V - 41A AC-21A - 690V - 125A AC-3 - 690V - 35A

Tehnični podatki - Nadaljevanje

izklopni pogoj (preklopna zmogljivost)	AC-23A - 230V - 22kW AC-3 - 690V - 30kW AC-23A - 690V - 37kW AC-3 - 400V - 37kW AC-23A - 400V - 45kW AC-3 - 230V - 22kW
V skladu z UL508 / CSA	
vrsta priključka	UL/CSA - AWG 12-1
delovna napetost AC (V)	600
Thermal rated continuous current (A)	125
Aktivna moč	3x480VAC - 75Hp 3x240VAC - 40Hp 3x600VAC - 100Hp
priključek	
Conventional thermal current Ith (A)	125
pritezni navor (Nm)	3
prerez priključka, večžični (mm ²)	4-50
prerez priključka, enožični (mm ²)	4-50
prerez priključka, finožični s kabelsko z votlico (mm ²)	4-35
Retrofit contacts	
Neutral conductor contacts	Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement) As soon as a 3-pole switch is converted to a 4-pole switch using a neutral conductor contact, NO additional auxiliary contact is permitted to be attached to the neutral conductor contact! For further information, see the data sheet for the respective switch.
obratovalna temperatura	-25 °C to +55 °C
mehanska življenjska doba	100000 switching cycles
izguba na pol (W)	12
zaščita pred dotikom	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
stopnja mehanske zaščite	IP65 (front), IP10 (output terminals), IP20 (supply terminals with terminal cover and Cable cross-section bigger than 16mm ²)
možnost zaklepanja	ne
neto dolžina (mm)	97,00
neto širina (mm)	28,00
neto višina (mm)	44,00
min. temperatura okolja (°C)	-25
maks. temperatura okolja (°C)	55

Merska skica: N-kontakt za 3-polna stikala INSE, 100-125A

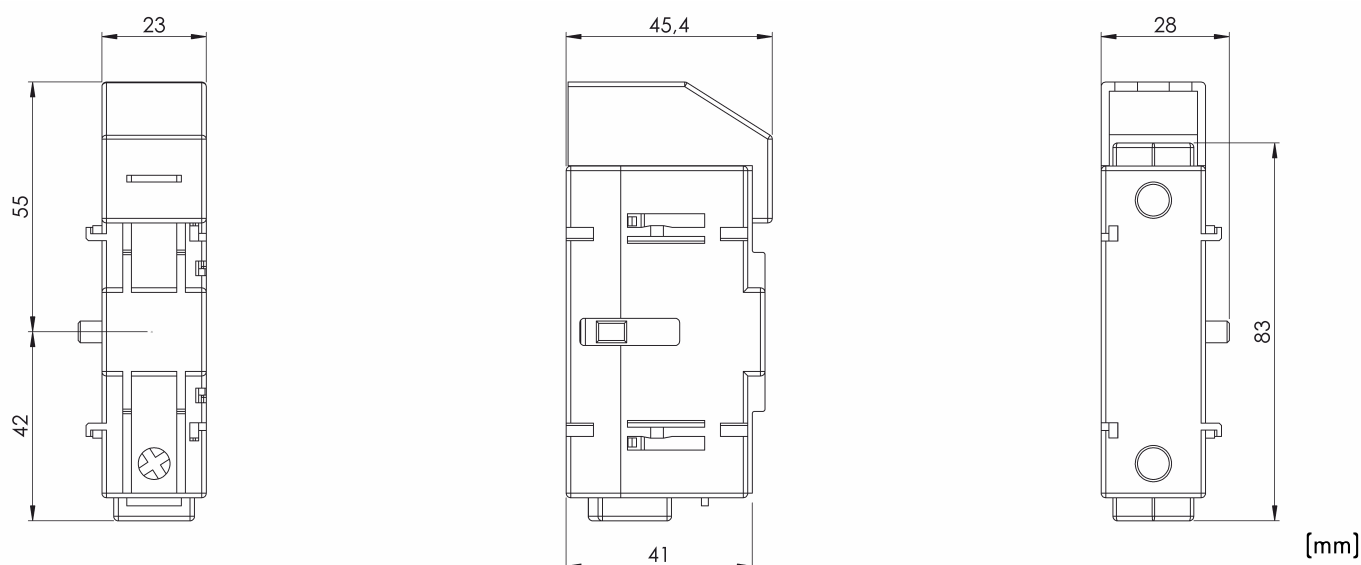

Opis	Šifra
N-kontakt za 3-polna stikala INSE, 100-125A	
Zaskočna pritrditev N-kontakta za naknadno predelavo 3-polnega stikala na 4-polno stikalo. Uporablja se lahko samo s stikali 100-125A INSE. Ni primerno za uporabo z INSR, INSP in INSA!	INSNK023