

Podatkovni list izdelka: INSP141C--

Stikalo, servisno, 4P, 250A, IP65, priprava za zaklepanje

izvedba Repairswitch, nazivni tok 250A, poli 4, stopnja mehanske zaščite IP65 (housing), IP10 (terminals)



Tehnični podatki

izvedba	Repairswitch
nazivni tok (A)	250
poli	4
montaža	nadgradna montaža
standard	IEC 60947, EN 60947, VDE 0660
naznačena izolacijska napetost [Ui] (V)	690
naznačena impulzna zdržna napetost [Uimp] (V)	6000
naznačeni kratkotrajni zdržni tok Icw	1000
naznačeni kratkostični tok	10kA @ 440V / 6kA @ 690V
frekvenca (Hz)	50/60
izklopni pogoji (obratovalni tok)	AC-3 - 690V - 47A AC-23A - 690V - 57A AC-21A - 690V - 250A AC-3 - 400V - 195A AC-23A - 400V - 230A




Tehnični podatki - Nadaljevanje

izklopni pogoj (preklopna zmogljivost)	AC-23A - 400V - 132kW AC-3 - 690V - 45kW AC-23A - 690V - 55kW AC-3 - 400V - 110kW
V skladu z UL508 / CSA	
delovna napetost AC (V)	600
Thermal rated continuous current (A)	250
priključek	
Conventional thermal current Ith (A)	250
pritezni navor (Nm)	3
prerez priključka, večžični (mm ²)	16-185
prerez priključka, enožični (mm ²)	16-185
prerez priključka, finožični s kabelsko z votlico (mm ²)	16-150
Retrofit contacts	
pomožni kontakti	Maximum 2x INSHK001-- permitted. 1x INSHK001-- can be snapped on to the left side of the main contact and 1x INSHK001-- to the right side of the main contact. Maximum configuration 2x NC contact / 2x NO contact. The switching behavior is the same regardless of whether the auxiliary contact is snapped on to the left or right side of the main contact.
Neutral conductor contacts	Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)
obratovalna temperatura	-25 °C to +55 °C
mehanska življenjska doba	100000 switching cycles
izguba na pol (W)	36
zaščita pred dotikom	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
stopnja mehanske zaščite	IP65 (housing), IP10 (terminals)
možnost zaklepanja	With 3 locks, each with a shackle lock diameter of 4-6 mm
neto dolžina (mm)	225,00
neto širina (mm)	374,00
neto višina (mm)	374,00
min. temperatura okolja (°C)	-25
maks. temperatura okolja (°C)	55

Schaltbild INSP141C--



Maßbild INSP141C--

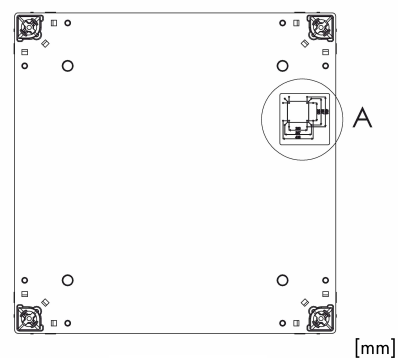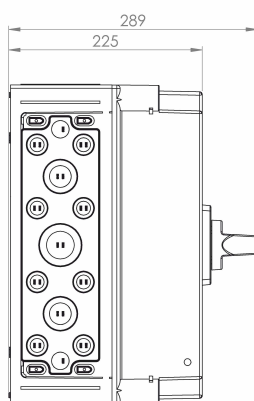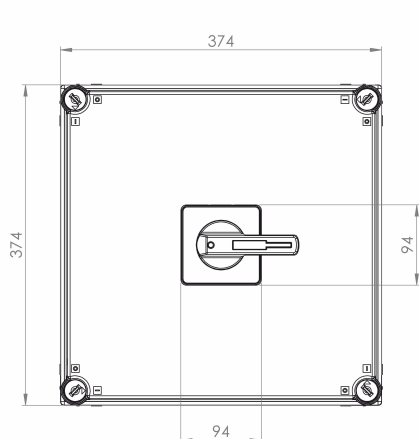

Montageanleitung INSHK Hilfskontakte

Hilfskontakt
Auxiliary contact
INSHK001--



Tabela izdelkov

Opis	Šifra
Stikalo, servisno, 4P, 250A, IP65, priprava za zaklepanje izvedba Repairswitch, nazivni tok 250A, poli 4, stopnja mehanske zaščite IP65 (housing), IP10 (terminals)	INSP141C
dodatni pribor	
Kontakt, pomožni, 1NO/1NC, za INSR, INSP in INSA Ni za uporabo za INSE, izvedba pribor, stopnja mehanske zaščite IP20 (sponke)	INSHK001