


Podatkovni list izdelka: IP1086466-

High-current terminal for aluminum and copper, UBAL 50 BU

nominal current: 145 A, connection method: Screw connection, cross section: 6 - 50 mm², blue

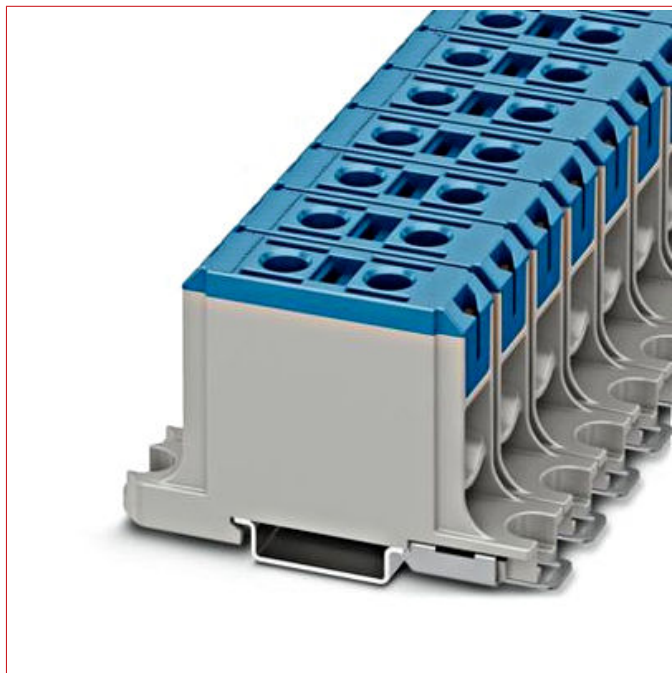

Tehnični podatki

neto globina (mm)	51,00
neto širina (mm)	19,20
neto višina (mm)	82,50
neto masa (kg)	0,02
EAN-koda	4055626877891
toplotne izgube (W)	4,73
min. temperatura okolja (°C)	-60
maks. temperatura okolja (°C)	85
Osnovni opis	sponka
sistem	vijačna sponka
serija	UBAL
izvedba	sponka za večje tokove
maks. presek togih vodnikov (mm ²)	70
maks. presek mehkih vodnikov (mm ²)	70
maks. presek, mehki vodnik, s kabelsko votlico (mm ²)	50
min. presek togih vodnikov (mm ²)	10

Tehnični podatki - Nadaljevanje

min. presek, mehki vodnik (mm ²)	10
min. presek, mehki vodnik, s kabelsko votlico (mm ²)	10
presek (mm ²)	70
barva	modra
nazivni tok (A)	145

Opis	Šifra
High-current terminal for aluminum and copper, UBAL 50 BU nominal current: 145 A, connection method: Screw connection, cross section: 6 - 50 mm ² , blue	IP1086466