


Podatkovni list izdelka: IL423328-A

Zählerverteiler Einsatz 3-28G, 6 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

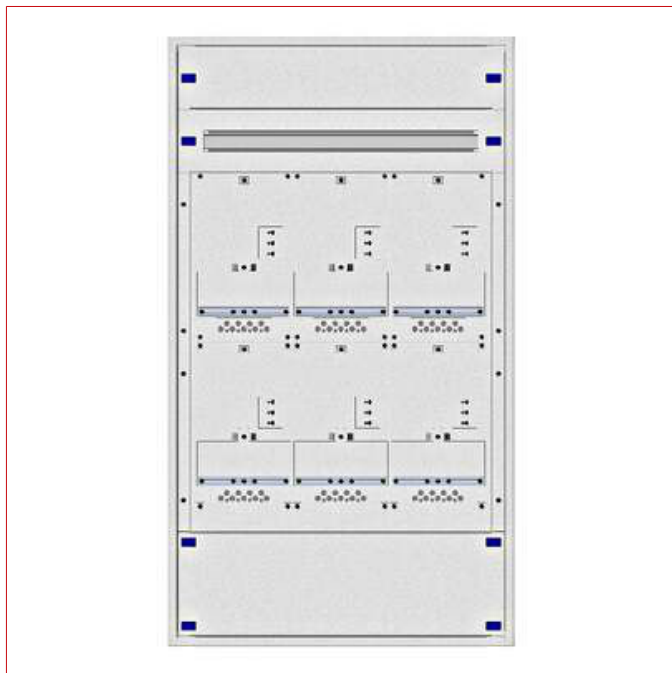

Tehnični podatki

neto širina (mm)	720,00
neto višina (mm)	1.290,00
neto globina (mm)	102,00
EAN-koda	9004840967029
tip	vložek za števecni razdelilnik
pokrajina	Tirolska
vgradne komponente	čelna plošča, jeklo
barva	RAL 7035
širina števca	3
višinska enota (HE)	28
število števecv v vrsti	2
števčna mesta	6
predštevčne vrste	1
material čelne plošče	jeklena pločevina
Osnovni opis	vložek
širinskih enot	33

Tabela izdelkov

Opis	Teža bakra (kg/km)	Šifra
Zählerverteiler Einsatz 3-28G, 6 Zählerplätze, Tirol Frontblende Stahlblech, komplett		IL423328-A
dodatni pribor		
Komplet, ozemljitveni, 300mm/Yf 6mm ² predpripravljeni vijaki		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824