


Podatkovni list izdelka: LI1007236-

I-RING, nadometna stenska svetilka, 9,2W, 3000K, antracitna

I-RING, nadometna stenska svetilka, 9,2W, 3000K, antracitna

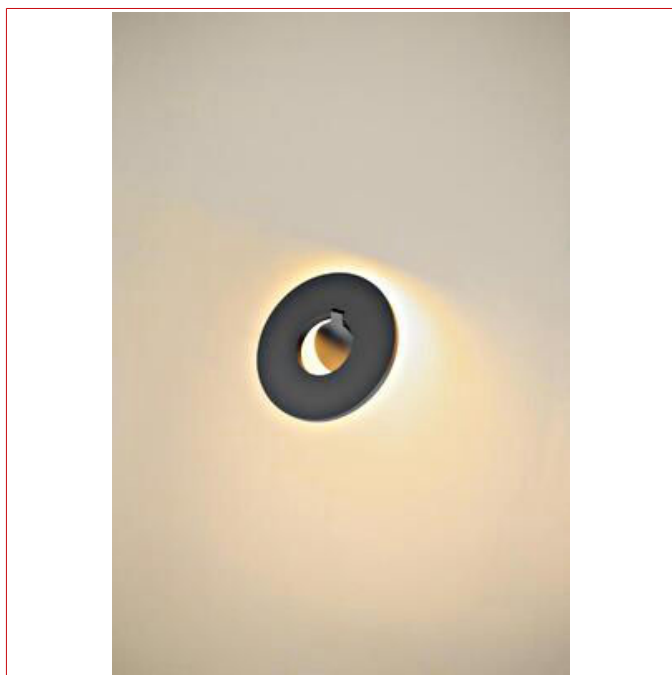

Informacija o izdelku

Indirect lighting in an organic ring shape summed up: the new I-RING wall light creates flexible and warm-white (3000K) accented lighting in upmarket outdoor areas thanks to its pivoting and rotatable lamp head. It also prevents light pollution as far as possible. The anthracite-coloured outdoor light is optimally protected thanks to its IP65 rating and features an exceptionally long lifespan of 50,000 hours. A well-rounded lighting experience.

Tehnični podatki

svetlobni tok (lm) (lm)	670
barva svetlobe	toplo bela
barvna temperatura (K)	3000
indeks barvnega videza Ra	≥80
življenjska doba	50000
zatemnilno	ne
zaščitni razred	I
razred energetske učinkovitosti	D
mehanska odpornost	IK05
vrsta svetilke	stenska nadgradna svetila
vklj. s svetlobnim virom	da

Tehnični podatki - Nadaljevanje

okov	LED Platine
moč (W)	9,20
delovna napetost AC (V)	100-240
delovni tok mA (mA)	350
montaža	stenska nadgradna
barva	antracitno siva
material	aluminij
dolžina (mm)	240
višina (mm)	240
premer (mm)	240
dodatni pribor	LI228753--
DxŠxV mm	240x240x82
ØxV mm	240x82

Tabela izdelkov

Opis	Šifra
I-RING, nadometna stenska svetilka, 9,2W, 3000K, antracitna	LI1007236
I-RING, nadometna stenska svetilka, 9,2W, 3000K, antracitna	
dodatni pribor	
Vijaki, set, nerjaveče jeklo, M8	LI228753