


Podatkovni list izdelka: LID13611--

7880/C dvojni LED trak 24V CW 5m zvitek

28,8W/m IP20 €ECONOMY

LED trak, zatemnilni, zvitek 5 metrov; 08 STRIPS & PROFILES

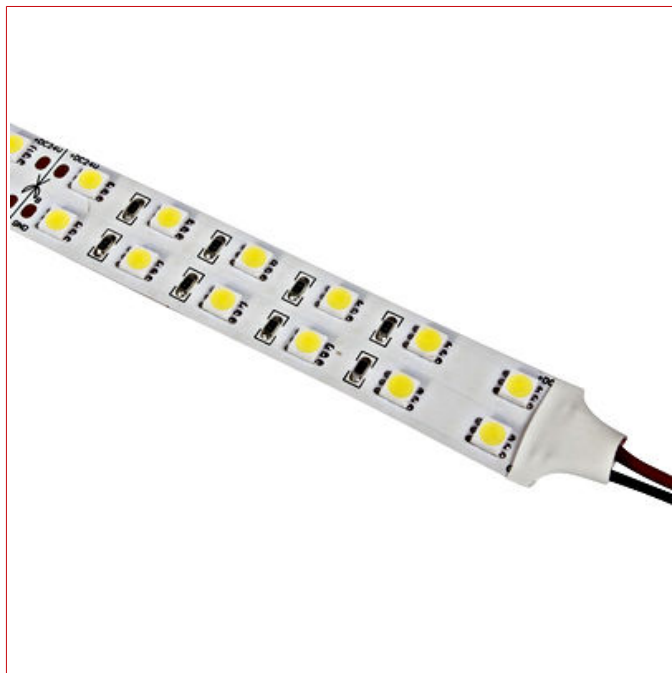

Informacija o izdelku

Flexible LED light strip, with SMD2835 LEDs, 120LEDs/meter, 28,8W/meter. Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing. Can be cut every 10cm (12-LED segment). Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.



Tehnični podatki

barva svetlobe	nevtrarno bela
barvna temperatura (K)	4000
indeks barvnega videza Ra	≥90
zatemnilno	odvisno od napajalnika da
zaščitni razred	III
stopnja mehanske zaščite	IP20
EEK	F
razred energetske učinkovitosti	F

Tehnični podatki - Nadaljevanje

vrsta svetilke	LED trak
vklij. s svetlobnim virom	da
okov	LED Platine
kot osvetlitve (°)	120
sistemska učinkovitost (lm/W)	80
krmilna naprava	potrebno naročiti posebej
delovna napetost DC (V)	24
vhodna napetost DC (V)	24
montaža	talna nadgradna stenska nadgradna nadgradna stropna
material	umetna masa
dolžina (mm)	5000
širina (mm)	20
višina (mm)	3
dodatni pribor	LID13864--;LID13867--;LID13863--;
DxŠxV mm	5000x20x3
svetlobni tok/m (lm/m) (lm/m)	2304

Merska skica: 7880/C dvojni LED trak 24V CW 5m zvitek 28,8W/m IP20



Tabela izdelkov

Opis	Šifra
7880/C dvojni LED trak 24V CW 5m zvitek 28,8W/m IP20 LED trak, zatemnilni, zvitek 5 metrov; 08 STRIPS & PROFILES	LID13611
dodatni pribor	
7912/AL profil 2m + PC opalni difuzor 08 STRIPS & PROFILES; primeren za LED trakove 7825, 7875, 7880	LID13864
7910/AL profil 2m + PC opalni difuzor 08 STRIPS & PROFILES; primeren za LED trakove 7820, 7821, 7830, 7831, 7870	LID13867
7910R/AL vgradni profil 2m + PC opalni difuzor 08 STRIPS & PROFILES; primeren za LED trakove 7825, 7875, 7880	LID13863