



Podatkovni list izdelka: LID13889--

Aline-R LED 7W 3000K 500lm, IP54, bela **ECONOMY**

Bathroom Downlights; 06 DOWNLIGHT FIX LED

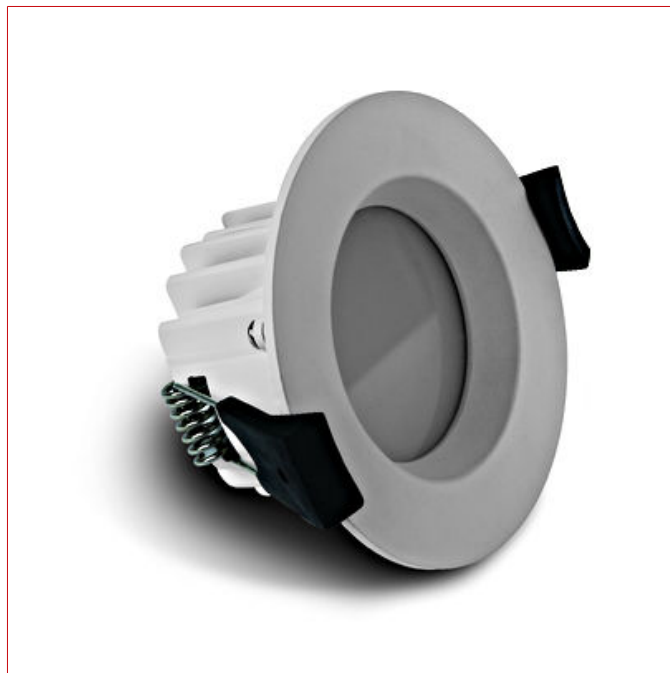

Informacija o izdelku

7W LED recessed downlight, IP54. Suitable for bathroom installations. Supplied with non-dimmable LED 180mA driver. Complies with standard EN60598-1 and any other specific standards.



Tehnični podatki

Tehnični podatki - Nadaljevanje

svetlobni tok (lm) (lm)	500
barva svetlobe	toplo bela
barvna temperatura (K)	3000
indeks barvnega videza Ra	≥80
življenjska doba	40.000h
zatemnilno	ne
zaščitni razred	II
stopnja mehanske zaščite	IP54
vrsta svetilke	stropna vgradna svetila
vkli. s svetlobnim virom	da
število svetilk	1
okov	LED Platine
kot osvetlitve (°)	90
sistemska učinkovitost (lm/W)	71
faktor moči	0,9
moč (W)	7
krmilna naprava	LED napajalnik
delovna napetost AC (V)	220-240
frekvenca (Hz)	50/60
montaža	podometna vgradna
izrez (mm)	Ø 65
vgradna globina (mm)	70
barva	bela
material	umetna masa tlačno liti aluminij
višina (mm)	45
premer (mm)	80
dodatni pribor	LID16949--
ØxV mm	80x45
IZREZ (mm)	Ø 65

Merska skica: Aline-R LED 7W 3000K 500lm, IP54, bela



Tabela izdelkov

Opis	Šifra
Aline-R LED 7W 3000K 500lm, IP54, bela Bathroom Downlights; 06 DOWNLIGHT FIX LED	LID13889
dodatni pribor	
050180E konektor hitri priklop kablov 32A 2x3-port 26 ACCES&GADGETS	LID16949