


Podatkovni list izdelka: LID17398--

7829A/C LED trak 24V DC CW 5m zvitek

9,6W/m IP20

LED trak, mehki, zatemnilni, 5m na zvitku; 08 STRIPS & PROFILES

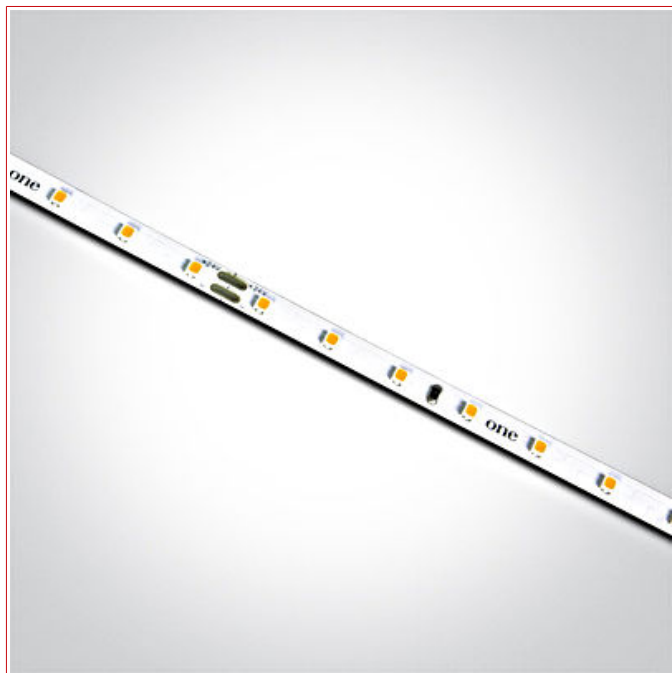

Informacija o izdelku

Flexible LED light strip with SMD2835 LEDs, 70LEDs/m, 9,6W/m. Supplied in 5 meters roll with 3M double face adhesive tape. Can be cut every 10cm (7-LED segment). Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.

Tehnični podatki

neto dolžina (mm)	5.000,00
neto širina (mm)	8,00
vrsta svetilke	LED trak
montaža	talna nadgradna stenska nadgradna nadgradna stropna
krmilna naprava	potrebno naročiti posebej
delovna napetost DC (V)	24
vhodna napetost DC (V)	24
okov	LED Platine
sistemska učinkovitost (lm/W)	101
barva svetlobe	nevtrarno bela

Tehnični podatki - Nadaljevanje

barvna temperatura (K)	4000
indeks barvnega videza Ra	≥90
svetlobni tok/m (lm/m) (lm/m)	970
zatemnilno	odvisno od napajalnika da
zaščitni razred	III
stopnja mehanske zaščite	IP20
EEK	E
razred energetske učinkovitosti	E
vklij. s svetlobnim virom	da

Merska skica: 7829A/C LED trak 24V DC CW 5m zvitek 9,6W/m IP20

Cut every 10cm
(7-LED segment)



Opis	Šifra
7829A/C LED trak 24V DC CW 5m zvitek 9,6W/m IP20	LID17398
LED trak, mehki, zatemnilni, 5m na zvitku; 08 STRIPS & PROFILES	