

Podatkovni list izdelka: MG957150-A

Tokovnik, 1500A/5A, 65x32mm, razred 0,5

vhodni tok 1500A, stopnja mehanske zaščite IP00 sponke, IP20 s prekritjem sponk, razred 0,5



Tehnični podatki

opomba

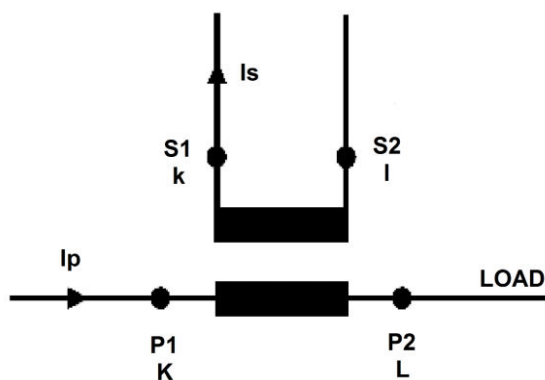
The converter is not allowed to be operated with open secondary side, because this leads to a dangerous overvoltage at the secondary side and overheating of the converter!!! (EN60044-1/A2)
Therefore, when disconnecting the measuring device, meter or power analyzer, short-circuit the secondary side.

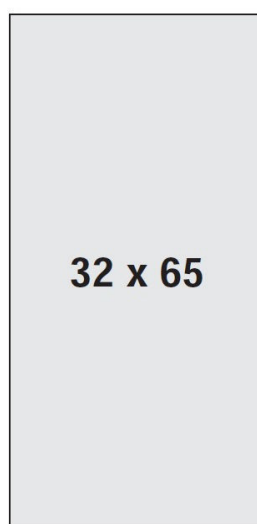
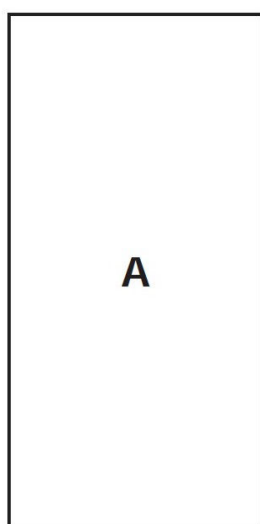
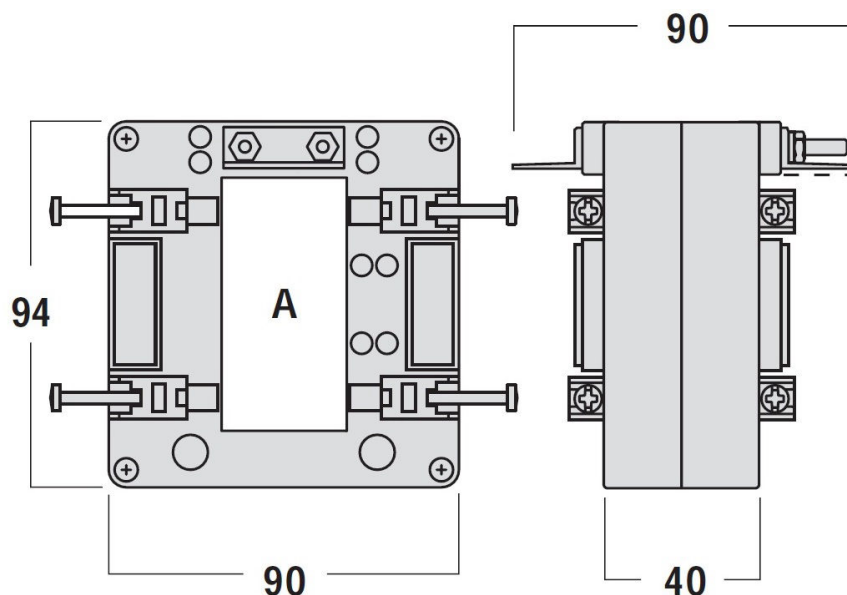
namen uporabe	za bakrene zbiranke do 65 x 32mm
standard za izdelek	BS3938 EN 61869-2 BS7626
izrez (mm)	65x32
specifikacije	
nazivni tok na primarni strani I _{pr} (A)	1500
nazivna frekvenca (Hz)	50
nazivni tok na sekundarni strani I _{pr}	5A
ohišje	
material ohišja	razred V0 v skladu z UL-94 polikarbonat, samougasljiv
stopnja mehanske zaščite	IP00 sponke IP20 s prekritjem sponk

Tehnični podatki - Nadaljevanje

masa (g)	750
vrsta montaže	by fixing screws on the busbar
priključek	
ožičenje sekundarna stran	vijačne sponke M4
razred natančnosti	
breme	razred 0,5 (20VA) razred 1 (25VA) razred 3 (30VA)

Schaltbild



Maßbild

SCHRACK Technik GmbH, AT-1235 Wien, Seybelgasse 13
www.schrack.com

Tabela izdelkov

Opis	Šifra
Tokovnik, 1500A/5A, 65x32mm, razred 0,5 vhodni tok 1500A, stopnja mehanske zaščite IP00 sponke, IP20 s prekritjem sponk, razred 0,5	MG957150-A
dodatni pribor	
Števec, digitalni, preko tokovnika 1A/5A (6A), MID 3-fazni, 2 tarifi, PRO380 S CT	MGX20006
Števec, digitalni, preko tokovnika 1A/5A(6A), MID, M-Bus 3-fazni, 2 tarifi, PRO380 M-Bus CT	MGX20306
Števec trifaznega toka, digitalni, preko tokovnika 1A/5A(6A) MID, Modbus, merjenje dobave in odjema (2 smeri), Modbus: izbira hitrosti prenosa podatkov 300/600/1200/4800/960	MGX20406