

Podatkovni list izdelka: NL91000023

Explosion proof emerg.luminaire EXIT zone 1/21 LED 230V AC/DC

arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm



Tehnični podatki

Neto dolžina (mm)	356,00
Neto višina (mm)	175,00
Neto globina (mm)	76,00
Neto teža (kg)	2,00
Vrsta sijalk	zasilna svetilka
z lastnim - centralnim napajanjem	svetilke s centralnim sistemom napajanja
Funkcija	standard
Izvedba	zasilne svetilke za eksplozijsko ogrožene prostore
Dizajn	EXIT
Barva	siva
Pictogram	Pictogram in accordance with ISO 7010 already affixed at the factory
Razdalja prepoznavnosti (m)	25
Svetilno telo	LED (3W)
Lumen	106
Območje napetosti (V)	110-277V AC; 110-250V DC
Stopnja zaščite	IP66
montaža	stenska
Najnižja temperatura okolice (°C)	-20
maks. temperatura okolice (°C)	40
AA razred E 8101	AA4
Proizvajalec	cooper Crouse-Hinds

Dimensions (mm)

NL9...

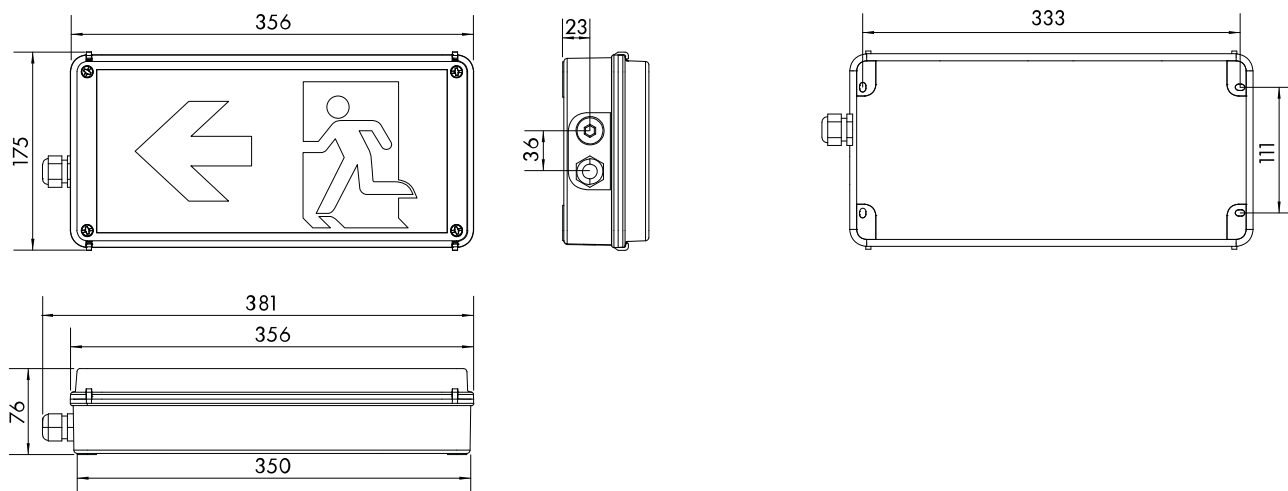


Tabela izdelkov

Opis	Šifra
Explosion proof emerg.luminaire EXIT zone1/21 LED 230V AC/DC arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm	NL91000023
Dodatna oprema	
Trafo elektronski z nadzorom,4-200VA,za zasilno razsvetljavo	NLMU05
Ohišje, IP65, z montažno ploščo in MU05 za svetilke 4 so 200VA	NLMU05BOX