

Podatkovni list izdelka: NL93000022

EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC

arrow left, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm



Tehnični podatki

Neto dolžina (mm)	356,00
Neto višina (mm)	175,00
Neto globina (mm)	76,00
Neto teža (kg)	2,00
Vrsta sijalk	zasilna svetilka
z lastnim - centralnim napajanjem	svetilke s centralnim sistemom napajanja
Funkcija	standard
Izvedba	zasilne svetilke za eksplozijsko ogrožene prostore
Dizajn	EXIT
Barva	siva
Razdalja prepoznavnosti (m)	25
Svetilno telo	LED (3W)
Lumen	106
Območje napetosti (V)	110-277V AC; 110-250V DC
Stopnja zaščite	IP66
Montaža	stenska
Najnižja temperatura okolice (°C)	-20
Najvišja temperatura okolice (°C)	40
AA razred E 8101	AA4
Proizvajalec	cooper Crouse-Hinds

Dimensions (mm)

NL9...

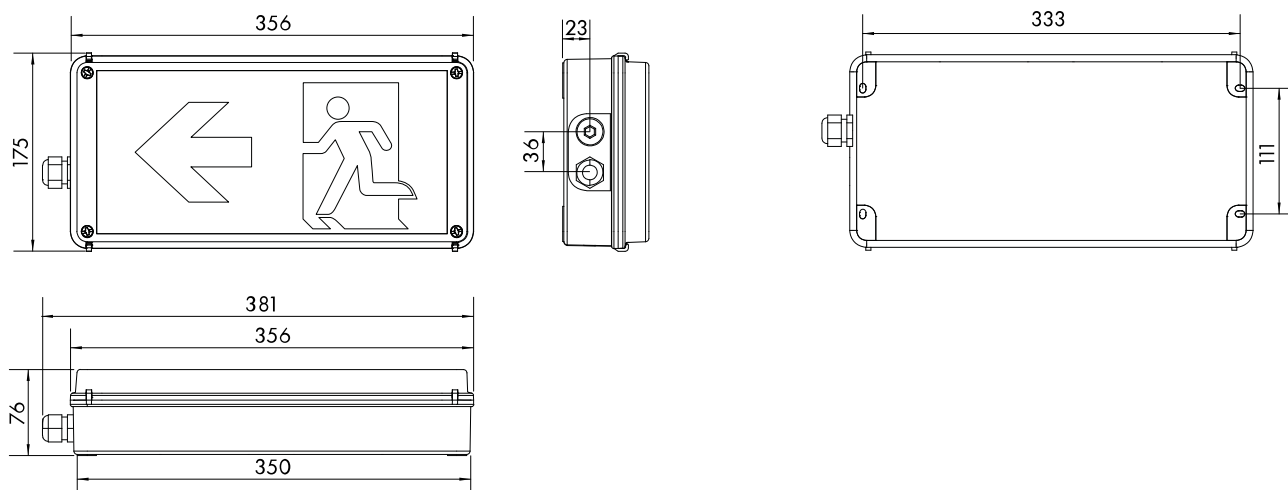


Tabela izdelkov

Opis	Šifra
EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC arrow left, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm	NL93000022
Dodatna oprema	
Trafo elektronski z nadzorom,4-200VA,za zasilno razsvetljavo	NLMU05
Ohišje, IP65, z montažno ploščo in MU05 za svetilke 4 so 200VA	NLMU05BOX