

Podatkovni list izdelka: NLAIEE09EL

Emergency luminaire Al stainless steel look, ceiling recessed

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm




Tehnični podatki

neto dolžina (mm)	167,00
neto širina (mm)	92,00
neto višina (mm)	159,00
neto masa (kg)	0,80
vrsta svetilke	varnostna svetilka s piktogramom
z lastnim – centralnim napajanjem	svetilka s centralnim sistemom napajanja
funkcija	z nadzorom - s centralnim preklapljanjem
izvedba	svetilka s piktogramom
oblika	Al
barva	izgled nerjavečega jekla
piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
razdalja prepoznavnosti (m)	15
svetlobi vir	LED (1.5W)
območje napetosti (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
stopnja mehanske zaščite	IP40
mehanska odpornost	≥ IK03
montaža	podometna vgradna

Tehnični podatki - Nadaljevanje

min. temperatura okolja (°C)	-5
maks. temperatura okolja (°C)	40
AA razred E 8101	AA4
proizvajalec	Schrack

Dimensions (mm)

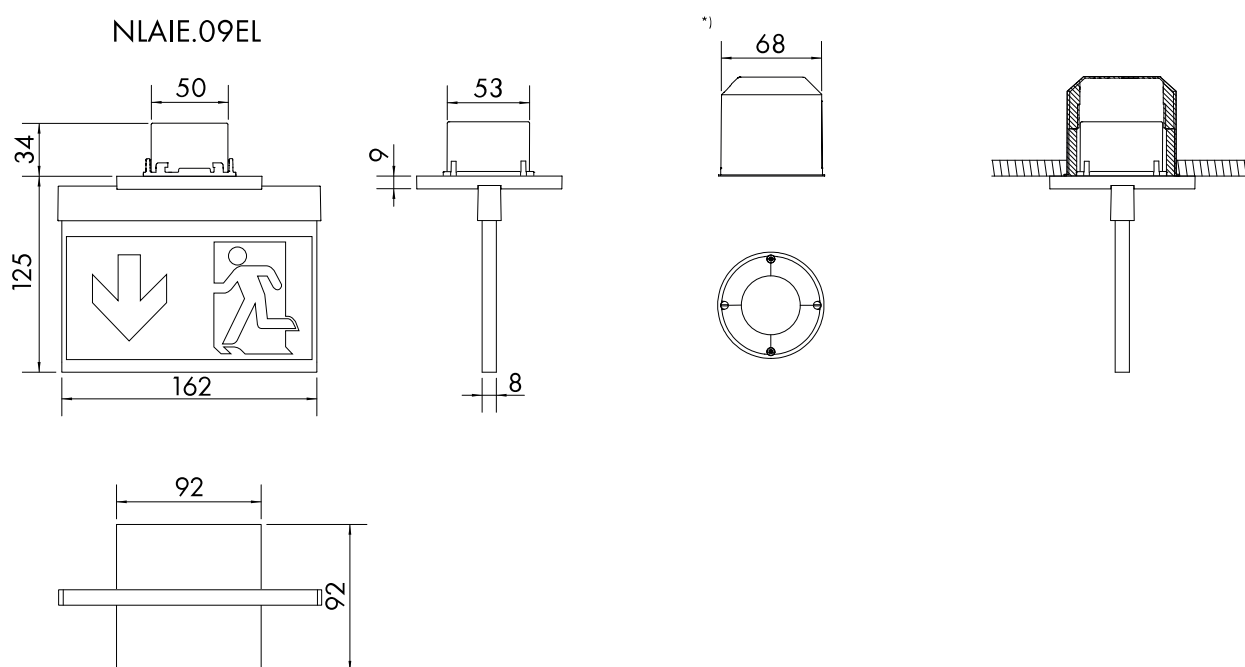

Opis	Šifra
Emergency luminaire Al stainless steel look, ceiling recessed	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm	NLAIEE09EL