


Podatkovni list izdelka: NLAIRA09EL

Emergency luminaire AI anthracite, LED, wall recessed

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in switch box Ø68mm

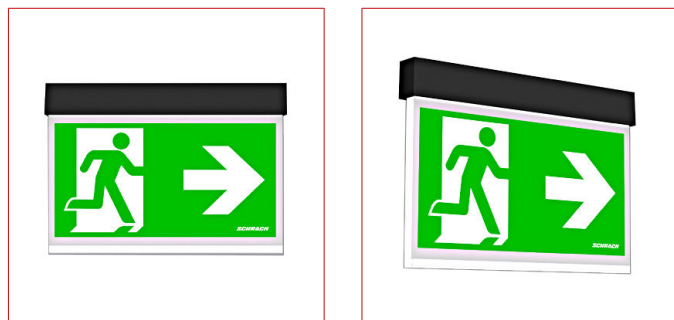

Tehnični podatki


neto dolžina (mm)	167,00
neto širina (mm)	57,00
neto višina (mm)	118,00
neto masa (kg)	0,80
vrsta svetilke	varnostna svetilka s piktogramom
z lastnim-centralnim napajanjem	svetilka s centralnim sistemom napajanja
funkcija	z nadzorom - s centralnim preklapljanjem
izvedba	svetilka s piktogramom
oblika	AI
barva	RAL 7016 (antracitno siva)
piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
razdalja prepoznavnosti (m)	15
svetlobi vir	LED (1.5W)
območje napetosti (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
stopnja mehanske zaščite	IP40
mehanska odpornost	≥ IK03
montaža	stenska vgradna

Tehnični podatki - Nadaljevanje

min. temperatura okolja (°C)	-5
maks. temperatura okolja (°C)	40
AA razred E 8101	AA4
proizvajalec	Schrack

Dimensions (mm)

NLAIR.09EL

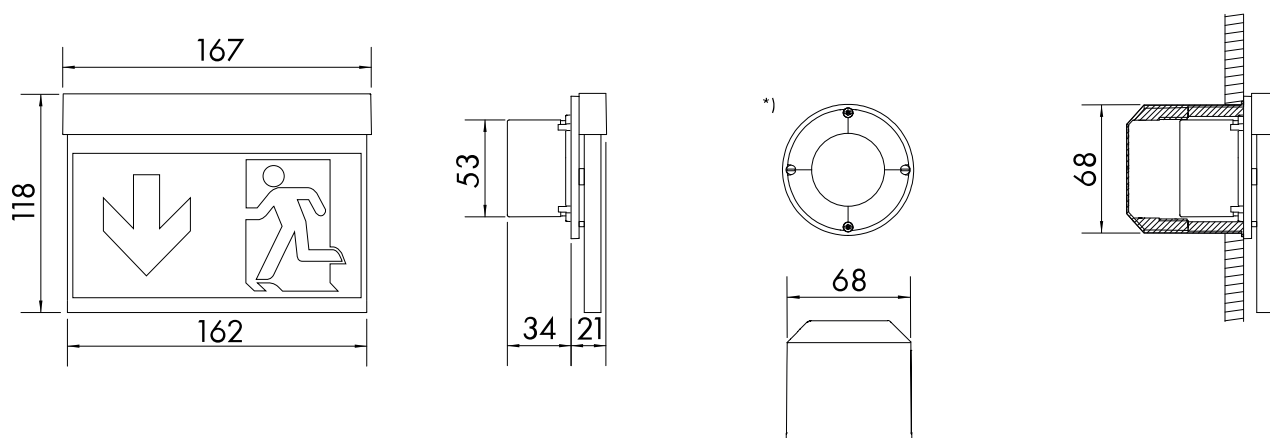

Opis	Šifra
Emergency luminaire Al anthracite, LED, wall recessed	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in NLAIRA09EL switch box Ø68mm	