

Podatkovni list izdelka: NLAXDA09EL

Emergency luminaire AX anthracite, LED, ceiling surface

Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC



Tehnični podatki

neto dolžina (mm)	317,00
neto širina (mm)	80,00
neto višina (mm)	228,00
neto masa (kg)	1,40
vrsta svetilke	varnostna svetilka s piktogramom
z lastnim-centralnim napajanjem	svetilka s centralnim sistemom napajanja
funkcija	z nadzorom - s centralnim preklapljanjem
izvedba	svetilka s piktogramom
oblika	AX
barva	RAL 7016 (antracitno siva)
piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
razdalja prepoznavnosti (m)	30
svetlobi vir	LED (3W)
območje napetosti (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
stopnja mehanske zaščite	IP40
mehanska odpornost	≥ IK03
montaža	nadgradna stropna
min. temperatura okolja (°C)	-5

Tehnični podatki - Nadaljevanje

maks. temperatura okolja (°C)	40
AA razred E 8101	AA4
proizvajalec	Schrack

Dimensions (mm)

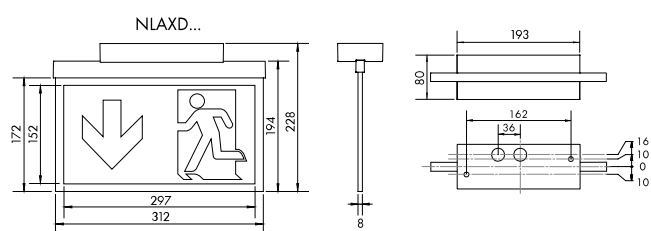


Tabela izdelkov

Opis	Šifra
Emergency luminaire AX anthracite, LED, ceiling surface Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC	NLAXDA09EL
dodatni pribor	
Adapter za nadgradnjo, za varnostne svetilke AM/AX antracitno siv, za stranski uvod kablov	NLAMAXAPAA