


Podatkovni list izdelka: NLKWD001SC

Emergency luminaire KW Autotest LED 3h 230V AC ceiling

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm

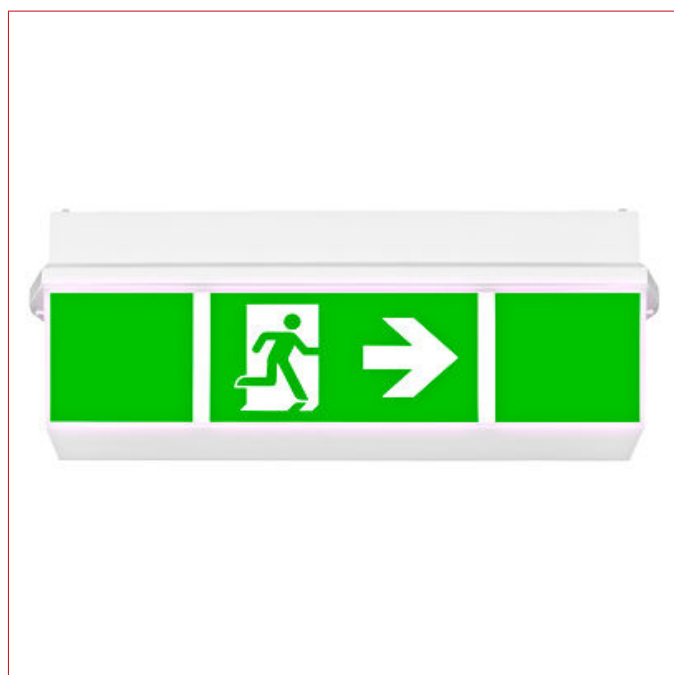


Tehnični podatki

Neto dolžina (mm)	390,00
Neto širina (mm)	93,00
Neto višina (mm)	139,00
Neto teža (kg)	1,30
Vrsta sijalk	zasilna svetilka
z lastnim - centralnim napajanjem	svetilke z lastnim napajanjem
Funkcija	samokontrolni
Izvedba	plastična svetilka
Dizajn	KW
Brez halogenov	ohišje iz umetne mase brez halogenov
Barva	bela
Razdalja prepoznavnosti (m)	16

Tehnični podatki - Nadaljevanje

Čas avtonomije (h)	3
Svetilno telo	LED (3W)
Lumen	1h: 300;3h: 300
Območje napetosti (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Stopnja zaščite	IP54
Montaža	nadgradna stropna
Najnižja temperatura okolice (°C)	-5
Najvišja temperatura okolice (°C)	40
AA razred E 8101	AA4
Proizvajalec	schrack

Abmessungen (mm)

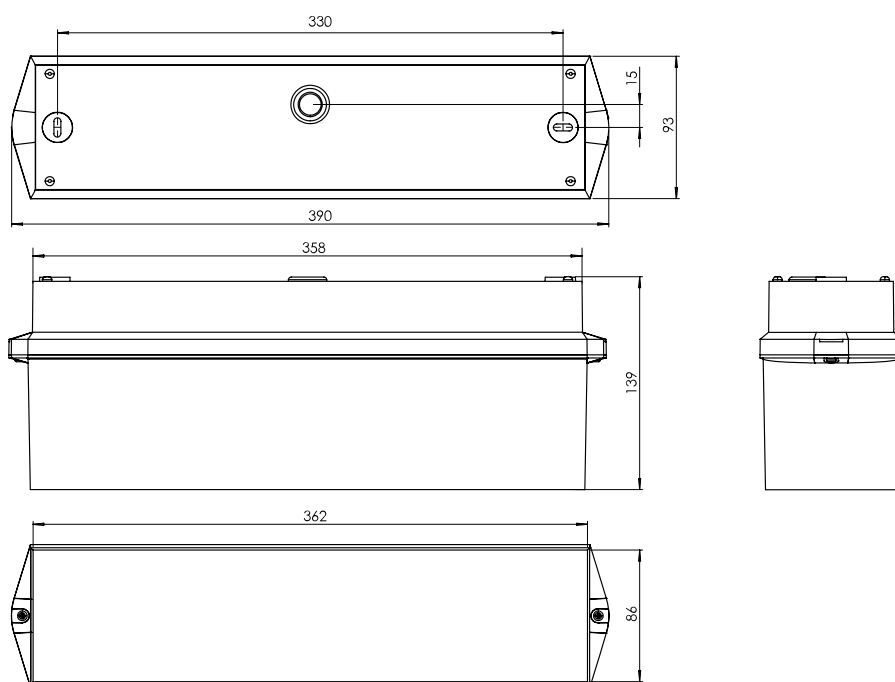

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,55	9,23	8,09	7,02	2,74
2,50	3,68	9,78	8,62	7,52	2,84
3,00	3,72	10,17	8,98	7,85	2,86
3,50	3,66	10,40	9,20	8,05	2,79
4,00	3,51	10,51	9,29	8,11	2,61
5,00	2,80	10,34	9,08	7,86	1,84

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	1,95	5,66	5,00	4,37	1,48
2,50	1,70	5,66	4,99	4,34	1,20
3,00	0,99	5,42	4,73	4,06	0,42

Tabela izdelkov

Opis	Šifra
Emergency luminaire KW Autotest LED 3h 230V AC ceiling 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD001SC side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm	
Dodatna oprema	
Zaščitna žična košar za svetilke KW in C1	NLBKW
Obešalo, ožičeno, dolžine 500 mm, bele barve	NL2PW
Stenski nosilec bel, primeren za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001