


Podatkovni list izdelka: NLKWD003SC

Svetilka, zasilna, KW samodiag. LED 1h/3h 230V AC strop.

1h/3h/8h adjustable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m

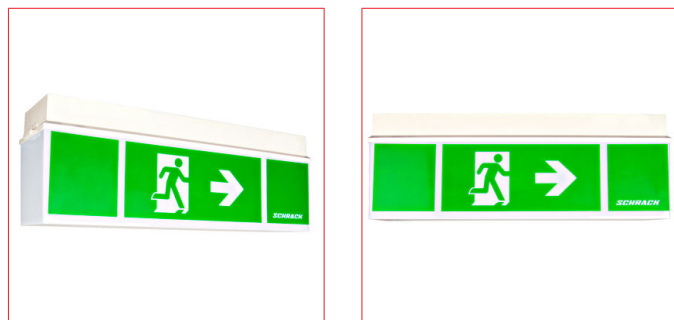


Tehnični podatki

Neto dolžina (mm)	360,00
Neto širina (mm)	92,00
Neto višina (mm)	125,00
Neto teža (kg)	1,30
Vrsta sijalk	Zasilna svetilka
z lastnim - centralnim napajanjem	Svetilke z lastnim napajanjem
Funkcija	Samokontrolni
Izvedba	Plastična svetilka
Dizajn	KW
Brez halogenov	Ohišje iz umetne mase brez halogenov
Barva	bela
Razdalja prepoznavnosti (m)	16
Čas avtonomije (h)	3
Svetilno telo	HP-LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Območje napetosti (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMH
Stopnja zaščite	IP54
Montaža	Nadgradna stropna
AA razred E 8101	AA4
Proizvajalec	Schrack

Dimensions (mm)

NLKWD...

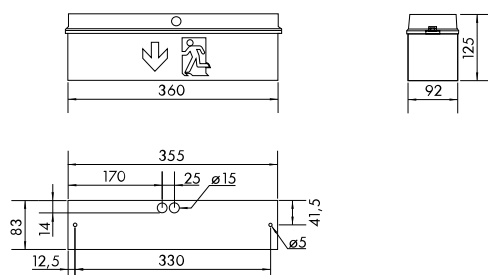

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	2,65	7,29	6,52	5,68	2,07
2,50	2,68	7,58	6,78	5,94	2,02
3,00	2,52	7,69	6,87	6,03	1,87
3,50	2,19	7,63	6,79	5,94	1,56
4,00	1,54	7,39	6,53	5,68	0,92

Tabela izdelkov

Opis	Šifra
Svetilka, zasilna, KW samodiag. LED 1h/3h 230V AC strop.	
1h/3h/8h adjustable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram NLKWD003SC on one side, viewing distance: 16m	
Dodatna oprema	
Pokrov zidni prozoren za serijo zasilnih svetilk KW,	NLKC
Zaščitna rešetka za luči: KW	NLBKW
Piktogram SET za svetilko tipa NLKW, - LEVO, DESNO, DOL	NLKW0103
Visok stropni pokrov za KW zasilne svetilke, opalni	NLKW
Baterija 9,6V 2,0 Ah za EB-svetilke ERT-LED 1h, 3h, 8h	NLAKKU9620
Suitable for LPU module	
Obešalo, ožičeno, dolžine 500 mm, bele barve	NL2PW
Stenski nosilec bel, primeren za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001