


Svetilka, varnostna, K W, LED 230 V, stropna montaža


suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m

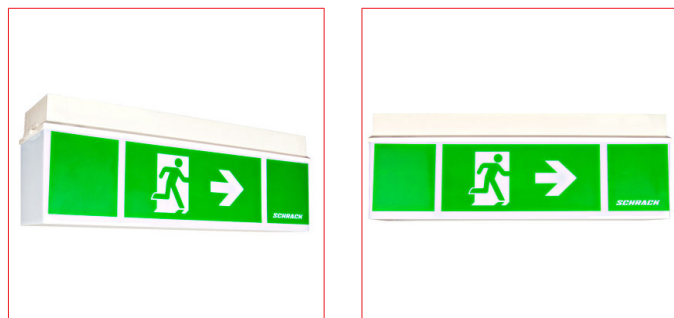

Tehnični podatki

Neto dolžina (mm)	360,00
Neto širina (mm)	92,00
Neto višina (mm)	125,00
Neto teža (kg)	0,70
Vrsta sijalk	Zasilna svetilka
z lastnim - centralnim napajanjem	Svetilke s centralnim sistemom napajanja
Funkcija	Standard
Izvedba	Plastična svetilka
Dizajn	KW
Brez halogenov	Ohišje iz umetne mase brez halogenov
Barva	bela
Razdalja prepoznavnosti (m)	16
Svetilno telo	HP-LED (3W)
Lumen	300
Območje napetosti (V)	230V AC 50Hz ±20%; 230V DC ±20%
Stopnja zaščite	IP54
Montaža	Nadgradna stropna
AA razred E 8101	AA4
Proizvajalec	Schrack

Dimensions (mm)

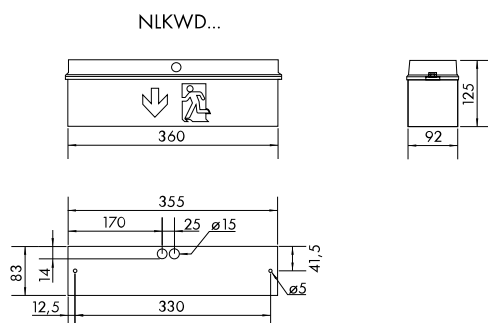

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,65	7,29	6,52	5,68	2,07
2,50	2,68	7,58	6,78	5,94	2,02
3,00	2,52	7,69	6,87	6,03	1,87
3,50	2,19	7,63	6,79	5,94	1,56
4,00	1,54	7,39	6,53	5,68	0,92

Tabela izdelkov

Opis	Šifra
Svetilka, varnostna, K W, LED 230 V, stropna montaža suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKW009
Dodatna oprema	
Pokrov zidni prozoren za serijo zasilnih svetilk KW,	NLKW0
Zaščitna rešetka za luči: KW	NLBKW
Piktogram SET za svetilko tipa NLKW, - LEVO, DESNO, DOL	NLKW0103
Visok stropni pokrov za KW zasilne svetilke, opalni	NLKW0H
Obešalo, ožičeno, dolžine 500 mm, bele barve	NL2PW
Stenski nosilec bel, primeren za: KB, KX, KW, KCD, KE, GX, RX	NLAWX001