

Podatkovni list izdelka: NLKWD818--

Svetilka zasilna, KW, 8W, EVG, 230V, 450lm, STROPNA

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m




Tehnični podatki

Vrsta sijalk	Combined rescue path and rescue sign luminaire Varnostne svetilke Zasilna svetilka
z lastnim - centralnim napajanjem	Svetilke s centralnim sistemom napajanja
Funkcija	Standard
Izvedba	Plastična svetilka
Dizajn	KW
Barva	bela
Razdalja prepoznavnosti (m)	16
Svetilno telo	T5 (8W)
Lumen	450
Območje napetosti (V)	230V AC 50Hz ±20%; 230V DC ±20%
Stopnja zaščite	IP54

Tehnični podatki - Nadaljevanje

Montaža	Nadgradna stropna
Neto teža (kg)	0,70

Dimensions (mm)

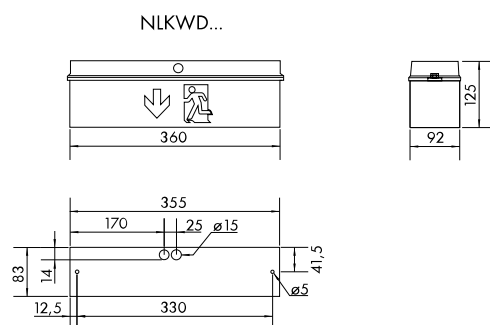

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,42	7,97	6,17	2,30
2,50	3,57	9,89	8,35	6,51	2,33
3,00	3,58	10,18	8,56	6,68	2,26
3,50	3,38	10,30	8,61	6,70	2,02
4,00	3,13	10,27	8,50	6,57	1,62

Tabela izdelkov

Opis	Šifra
Svetilka zasilna, KW, 8W,EVG,230V, 450lm, STROPNA suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKW818
Dodatna oprema	
Pokrov zidni prozoren za serijo zasilnih svetilk KW,	NLKC
Zaščitna rešetka za luči: KW	NLBKW
Piktogram SET za svetilko tipa NLKW, - LEVO, DESNO, DOL	NLKW0103
Visok stropni pokrov za KW zasilne svetilke, opalni	NLKW
Obešalo, ožičeno, dolžine 500 mm, bele barve	NL2PW
Stenski nosilec bel, primeren za:KB, KX, KW, KCD, KE, GX, RX	NLWX001