

Podatkovni list izdelka: NLKWD833SC

Zasilna svetilka KW avto test, 8W/3h, 230VAC, stropna m.

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m



Tehnični podatki


Vrsta sijalk	Combined rescue path and rescue sign luminaire Varnostne svetilke Zasilna svetilka
z lastnim - centralnim napajanjem	Svetilke z lastnim napajanjem
Funkcija	Samokontrolni
Izvedba	Plastična svetilka
Dizajn	KW
Brez halogenov	Ohišje iz umetne mase brez halogenov
Barva	bela
Razdalja prepoznavnosti (m)	16
Čas avtonomije (h)	3
Svetilno telo	T5 (8W)
Lumen	180

Tehnični podatki - Nadaljevanje

Območje napetosti (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,4 NiMh
Stopnja zaščite	IP54
Montaža	Nadgradna stropna
AA razred E 8101	AA5
Neto teža (kg)	0,70

Dimensions (mm)

NLKWD...

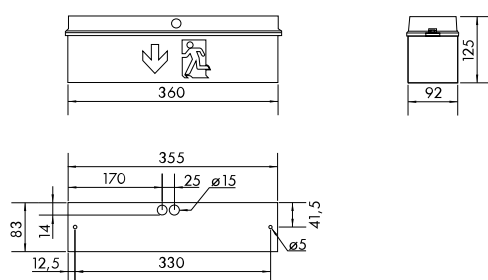

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,75	7,60	6,41	5,00	1,74
2,50	2,68	7,82	6,56	5,11	1,62
3,00	2,43	7,83	6,49	5,02	1,27
3,50	1,86	7,64	6,21	4,72	0,43
4,00	0,00	5,81	3,78	3,92	0,00

Tabela izdelkov

Opis	Šifra
Zasilna svetilka KW avto test, 8W/3h, 230VAC, stropna m. suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD833SC
Dodatna oprema	
Pokrov zidni prozoren za serijo zasilnih svetilk KW,	NLKWC
Zaščitna rešetka za luči: KW	NLBKW
Piktogram SET za svetilko tipa NLKW, - LEVO, DESNO, DOL	NLKW0103
Visok stropni pokrov za KW zasilne svetilke, opalni	NLKWH
Baterija 4,8V 2,4Ah za EB-svetilke 8W 3h NLxxx833	NLAKKU4824
Obešalo, ožičeno, dolžine 500 mm, bele barve	NL2PW
Stenski nosilec bel, primeren za:KB, KX, KW, KCD, KE, GX, RX	NLAWX001