


Podatkovni list izdelka: NLKWW033SC

EB zasil. KW avtotest 4x1W ERT-LED 1h, 3h, 8h 230V AC sten.

1h/3h/8h adjustable, suitable for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m

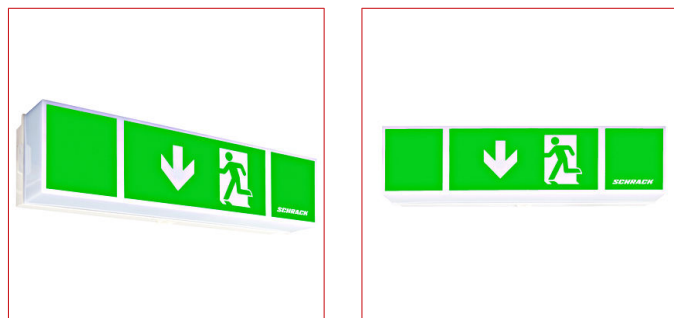


Tehnični podatki

Neto dolžina (mm)	360,00
Neto širina (mm)	92,00
Neto višina (mm)	85,00
Neto teža (kg)	0,70
Vrsta sijalk	varnostne svetilke zasilna svetilka
z lastnim - centralnim napajanjem	svetilke z lastnim napajanjem
Funkcija	samokontrolni
Izvedba	plastična svetilka
Dizajn	KW
Brez halogenov	ohišje iz umetne mase brez halogenov
Barva	bela
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Razdalja prepoznavnosti (m)	16
Čas avtonomije (h)	3
Svetilno telo	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Območje napetosti (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMh
Stopnja zaščite	IP54

Tehnični podatki - Nadaljevanje

montaža	stenska
AA razred E 8101	AA4
Proizvajalec	schrack

Dimensions (mm)

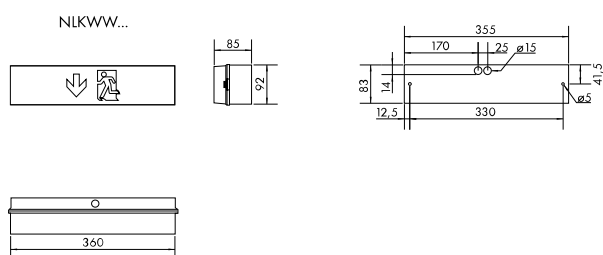

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	3,20	8,47	7,66	6,80	2,65
2,50	3,32	8,98	8,17	7,31	2,78
3,00	3,33	9,34	8,51	7,65	2,80
3,50	3,26	9,54	8,71	7,86	2,64
4,00	3,13	9,63	8,79	7,93	2,50

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 8h autonomy time

Montagehöhe [m]					
2,00	2,07	5,86	5,34	4,81	1,68
2,50	1,95	5,98	5,45	4,92	1,56
3,00	1,60	5,88	5,35	4,82	1,21
3,50	0,55	5,57	5,03	4,51	0,24
4,00	0,00	4,45	3,66	3,67	0,00

Tabela izdelkov

Opis	Šifra
EB zasil. KW avtotest 4x1W ERT-LED 1h,3h,8h 230V AC sten. 1h/3h/8h adjustable, suitable for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m	NLKWW033SC
Dodatna oprema	
Pokrov, zidni, prozoren, za varnostne svetilke KW	NLKCW
Košara, zaščitna, žična, za svetilke KW in C1	NLBKW
Piktogram, set, za NLKWl.. puščice levo, desno, gor, dol	NLKWIPKTO
Pokrov, nizek, stenski, za varnostne svetilke KW, opalni	NLKWN
Baterija 9,6V 2,0 Ah za EB-svetilke ERT-LED 1h, 3h, 8h primerna za LPU-modul	NLAKKU9620