

Podatkovni list izdelka: NLKXU039ML

CPS / LPS KX with supervision and mixed mode ERT-LED/230V

universal mounting; viewing distance: 30m



Tehnični podatki

Neto dolžina (mm)	332,00
Neto širina (mm)	48,00
Neto višina (mm)	242,00
Neto teža (kg)	1,10
Vrsta sijalk	Combined rescue path and rescue sign luminaire Varnostne svetilke Zasilna svetilka
z lastnim - centralnim napajanjem	Svetilke s centralnim sistemom napajanja
Funkcija	Z nadzorom in mešanim delovanjem
Izvedba	Plastična svetilka Ploska svetilka
Dizajn	KX
Brez halogenov	Ohišje iz umetne mase brez halogenov
Barva	bela
Razdalja prepoznavnosti (m)	30
Svetilno telo	ERT-LED (4W)
Lumen	520
Območje napetosti (V)	230V AC 50Hz ±20%; 230V DC ±20%
Stopnja zaščite	IP40

Tehnični podatki - Nadaljevanje

Montaža


Stenska

Nadgradna stropna


Stropna vgradna

Univerzalna

Dimensions (mm)

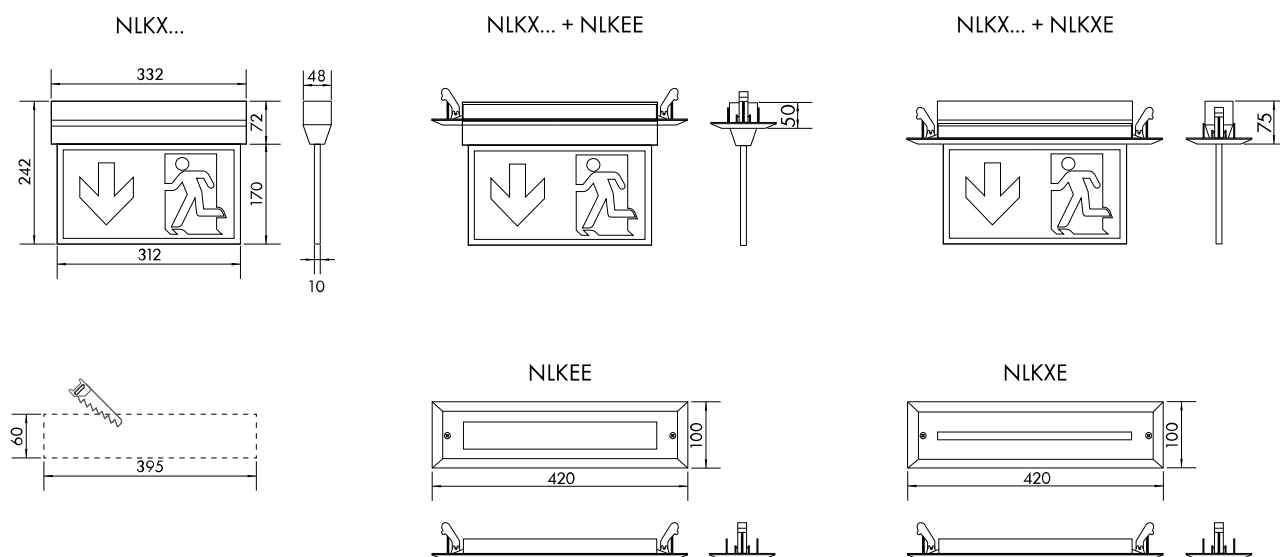

Drilling distances (mm)

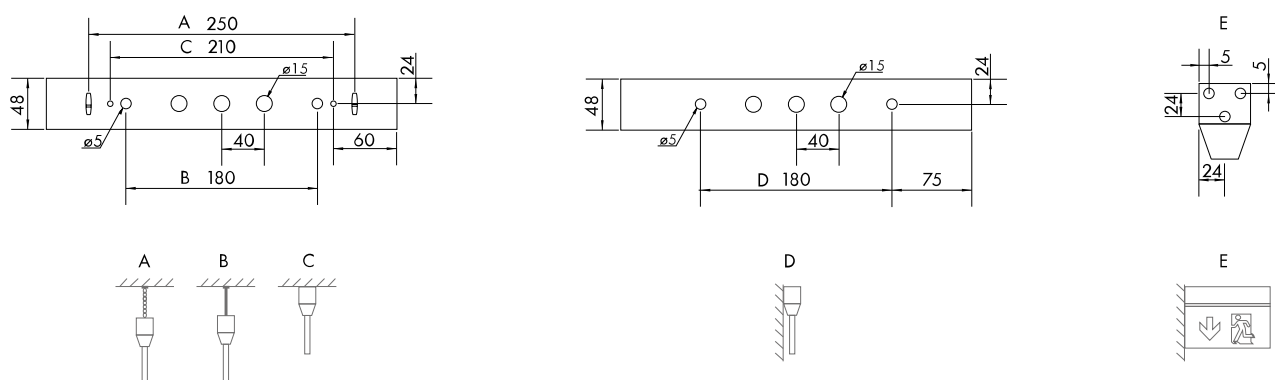

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	8,02	19,70	16,50	5,35	2,00
2,50	8,72	21,94	18,24	5,64	1,95
3,00	9,23	23,93	19,32	5,75	1,87
3,50	9,62	25,62	20,24	5,70	1,63
4,00	9,90	26,71	20,65	5,51	1,30

Tabela izdelkov

Opis	Šifra
CPS / LPS KX with supervision and mixed mode ERT-LED/230V universal mounting; viewing distance: 30m	NLKXU039ML
Dodatna oprema	
Ohišje za vgradnjo v beton za zasil.svetil. Design KX	NLKXBE
Montažni okvir za zasilno svetilko mali KE, KX -DESIGN	NLKXE
Malaplošča KX + 3-delni natični piktoset (vidnost 22m)	NLKXMINI
Montažni okvir za zas. svetilko velik KE, KX-opal -DESIGN	NLKEE
Obešalo, dvojno, Design, 500 mm, bel, ožičen	NL2DW
Obešalo, ožičeno, dolžine 500 mm, bele barve	NL2PW
Stenski nosilec bel, primeren za:KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Žična košara za svetilke: KD,KS,LI,KM,MK,S6,SD,SM,TI,TM,VM	NLBALL1
Obešalo jekleno za svetilko zasilno LI-DESIGN	NLDSA000
Komplet za visečo montažo 2000mm, 1 par	NLCORD2
Komplet za visečo montažo 4000mm, 1 par	NLCORD4