

Podatkovni list izdelka: NLPMD509CC

Emergency luminaire PM HP-LED CC24 24V ceiling mounting

with supervision - centrally switchable, viewing distance: 20m



Tehnični podatki

neto dolžina (mm)	236,00
neto širina (mm)	136,00
neto višina (mm)	168,00
neto masa (kg)	0,70
vrsta svetilke	varnostna svetilka s piktogramom
z lastnim-centralnim napajanjem	svetilka s centralnim sistemom napajanja
funkcija	24V Core24 z nadzorom - centralno krmljenje
izvedba	svetilka iz umetne mase
oblika	PM
brez halogenov	ohišje iz umetne mase brez halogenov
barva	RAL 9003 (bela)
piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
razdalja prepoznavnosti (m)	20

Tehnični podatki - Nadaljevanje

svetlobi vir	LED (3W)
območje napetosti (V)	24V AC
Power maintained mode (W)	2,80
Power non-maintained mode (W)	0,40
Power max. (W)	2,80
stopnja mehanske zaščite	IP65
mehanska odpornost	IK03
montaža	nadgradna stropna
min. temperatura okolja (°C)	-20
maks. temperatura okolja (°C)	40
AA razred E 8101	AA3 AA4 AA5
proizvajalec	Schrack

Abmessungen (mm)

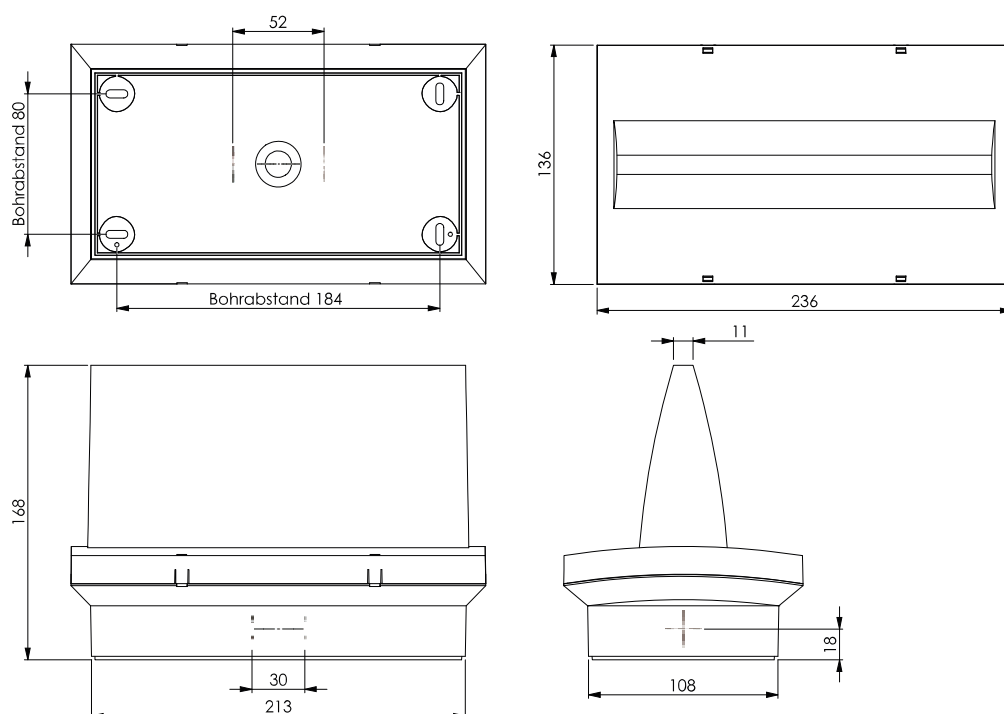


Tabela izdelkov

Opis	Šifra
Emergency luminaire PM HP-LED CC24 24V ceiling mounting with supervision - centrally switchable, viewing distance: 20m	NLPMD509CC
dodatni pribor	
Okvir, montažni, bel, za varnostne svetilke PM zahtevan stropni izrez: 246 x 152m	NLPME