

Podatkovni list izdelka: NLPMW509CC

# Emergency luminaire PM HP-LED CC24 24V universal mounting

with supervision - centrally switchable, viewing distance: 20m




## Tehnični podatki

|                                  |                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| neto dolžina (mm)                | 236,00                                                                                                                          |
| neto širina (mm)                 | 136,00                                                                                                                          |
| neto višina (mm)                 | 65,00                                                                                                                           |
| neto masa (kg)                   | 0,70                                                                                                                            |
| vrsta svetilke                   | varnostna svetilka s piktogramom                                                                                                |
| z lastnim –centralnim napajanjem | svetilka s centralnim sistemom napajanja                                                                                        |
| funkcija                         | 24V Core24 z nadzorom - centralno krmiljenje                                                                                    |
| izvedba                          | svetilka iz umetne mase                                                                                                         |
| oblika                           | PM                                                                                                                              |
| brez halogenov                   | ohišje iz umetne mase brez halogenov                                                                                            |
| barva                            | RAL 9003 (bela)                                                                                                                 |
| piktogram                        | Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010 |
| razdalja prepoznavnosti (m)      | 20                                                                                                                              |

## Tehnični podatki - Nadaljevanje

|                               |                   |
|-------------------------------|-------------------|
| svetlobi vir                  | LED (3W)          |
| območje napetosti (V)         | 24V AC            |
| Power maintained mode (W)     | 2,80              |
| Power non-maintained mode (W) | 0,40              |
| Power max. (W)                | 2,80              |
| stopnja mehanske zaščite      | IP65              |
| mehanska odpornost            | IK06              |
| montaža                       | stenska nadgradna |
| min. temperatura okolja (°C)  | -20               |
| maks. temperatura okolja (°C) | 40                |
| AA razred E 8101              | AA3<br>AA4<br>AA5 |
| proizvajalec                  | Schrack           |

## Abmessungen (mm)

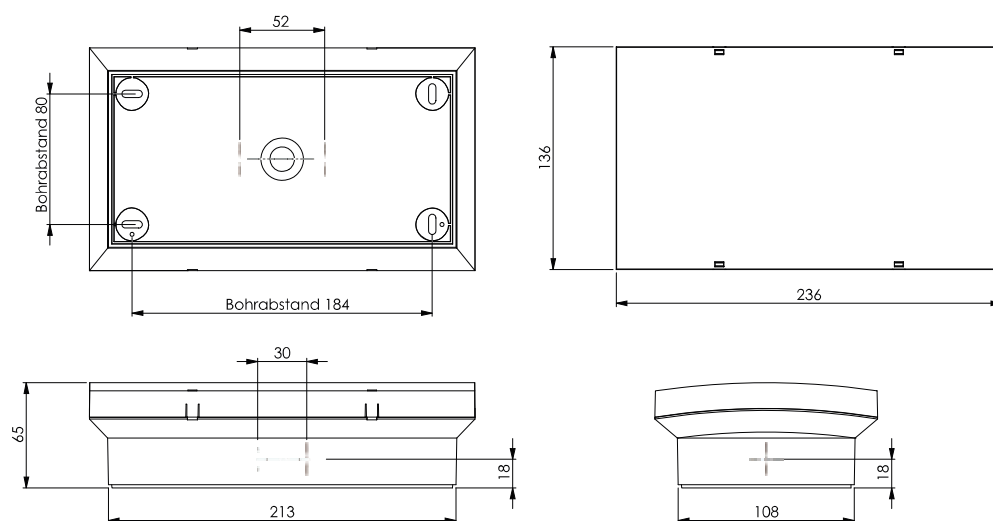

## Tabela izdelkov

| Opis                                                                                                                        | Šifra      |
|-----------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire PM HP-LED CC24 24V universal mounting<br>with supervision - centrally switchable, viewing distance: 20m | NLPMW509CC |
| <b>dodatni pribor</b>                                                                                                       |            |
| Okvir, montažni, bel, za varnostne svetilke PM<br>zahtevan stropni izrez: 246 x 152m                                        | NLPME      |