

Podatkovni list izdelka: NLPXD509CC

Emergency luminaire PX HP-LED CC24 24V, ceiling mounting

with supervision - centrally switchable, viewing distance: 30m




Tehnični podatki

neto dolžina (mm)	339,00
neto širina (mm)	73,00
neto višina (mm)	211,00
neto masa (kg)	1,37
vrsta svetilke	varnostna svetilka s piktogramom
z lastnim-centralnim napajanjem	svetilka s centralnim sistemom napajanja
funkcija	24V Core24 z nadzorom - centralno krmiljenje
izvedba	svetilka iz umetne mase
oblika	PX
brez halogenov	ohišje iz umetne mase brez halogenov
barva	RAL 9003 (bela)
piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
razdalja prepoznavnosti (m)	30

Tehnični podatki - Nadaljevanje

svetlobi vir	LED (3W)
lumen	335
območje napetosti (V)	24V AC
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
stopnja mehanske zaščite	IP65
mehanska odpornost	IK06
montaža	nadgradna stropna
min. temperatura okolja (°C)	-20
maks. temperatura okolja (°C)	50
AA razred E 8101	AA4
proizvajalec	Schrack

Abmessungen (mm)

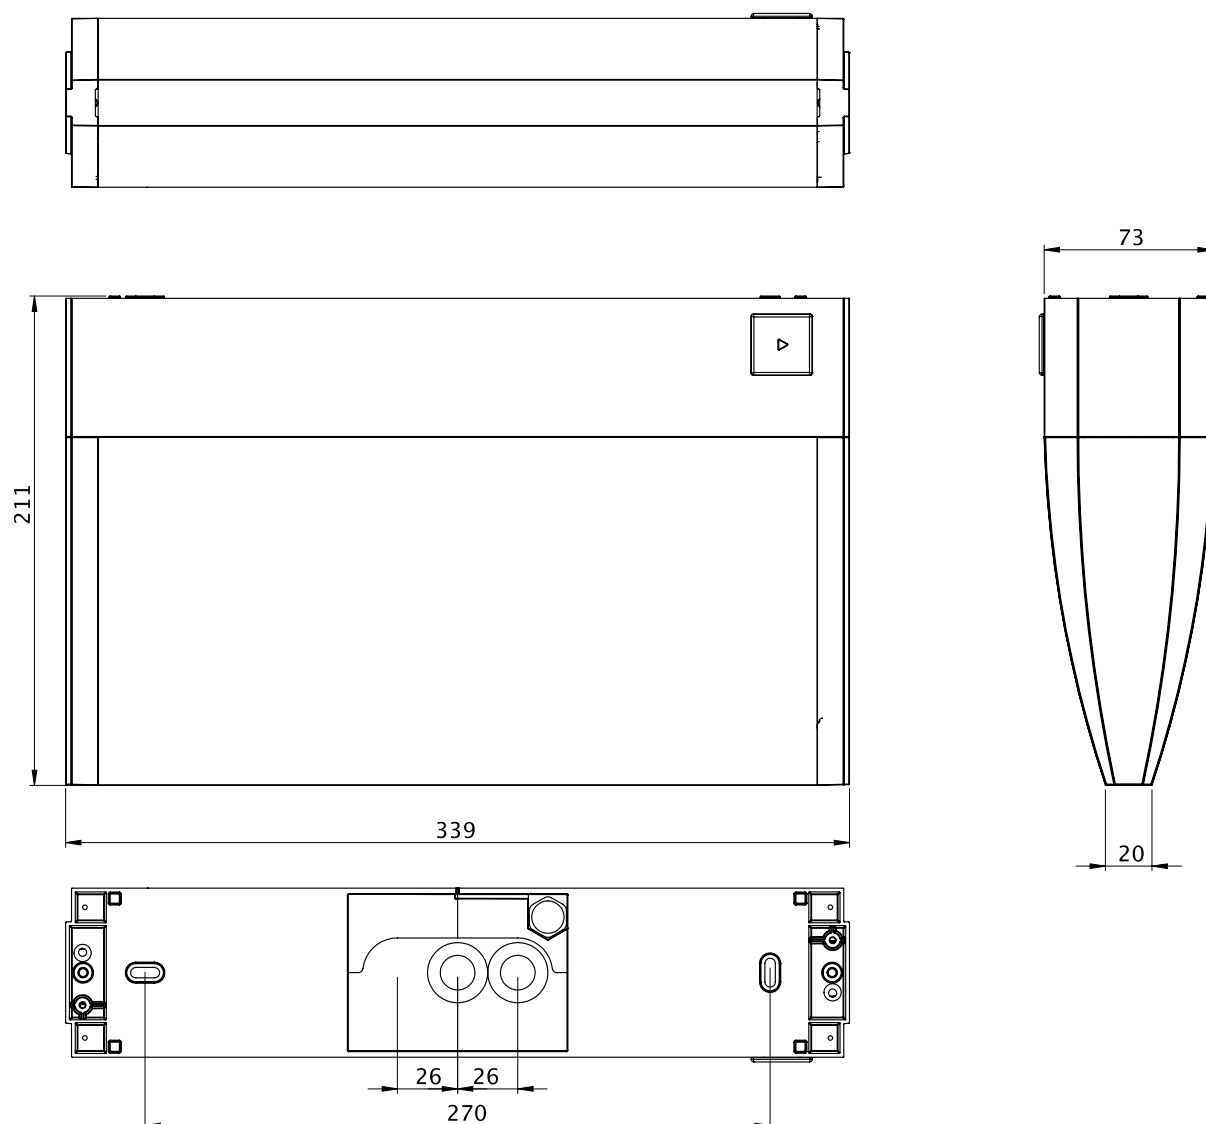

Opis	Šifra
Emergency luminaire PX HP-LED CC24 24V, ceiling mounting with supervision - centrally switchable, viewing distance: 30m	NLPXD509CC