

Podatkovni list izdelka: NLWLZENT01

WirelessControl prof. Linux centrala z zaslonom na dotik

v ohišji z možnostjo zaklepanja, za stensko montažo, z USB koordinatorjem za WirelessControll profesionalno omrežje in naloženo WL-programsko opremo za 250 svetilk



Informacija o izdelku

WirelessControl Professional makes wireless control and monitoring of single-battery emergency and safety luminaires child's play! The heart and thus the central unit of the system is the setup and monitoring unit NLWLZENT. Easy to install, it is built into a lockable wall-mounted housing.

Advantages of the central unit (NLWLZENT) at a glance:

- NLWLZENT, an in-house development based on a LINUX industrial PC with intuitive user interface
- Because of the use of the LINUX operating system more security against cyber attacks and less maintenance effort for updates
- Functional, service-friendly wall-mounted housing with integrated TOUCH Screen
- Installable at a continuously manned central location in the building
- All crucial system information directly and clearly at a glance
- The integrated control software is available in several languages
- The wireless system can include 250 luminaires per central unit as standard and can be expanded in steps of 250 up to 1,000 luminaires (NLWLUP250)
- In the standard scope equipped with 5 timer functions (storage of a schedule possible)
- Possibility of networking with other systems
- Externally accessible USB interface (e.g. connection USB stick for copy test protocol book or connection external wireless keyboard)
- Email transmission of error messages or test results (Internet access required)

Tehnični podatki

Neto širina (mm)	295,00
Neto višina (mm)	223,00
Neto globina (mm)	58,00
Neto teža (kg)	2,55
Podobni izdelki	WirelessControl centrala
Stopnja zaščite	IP20
Območje napetosti (V)	230V AC 50Hz ±20%
Montaža	Stenska

Tabela datoteke: WirelessControl prof. Linux centrala z zaslonom na dotik

Prozessor-Chipsatz:	ARM Cortex-A53 64-bit
Prozessor-Taktrate:	1,2 GHz
Arbeitsspeicher:	1GB LPDDR
Festplatte:	8GB EMMC
LAN:	10/100 Gbit
Leistungsaufnahme:	max. 17W PFO, 52
Schutzklasse:	I
Abmessungen H x B x T (mm):	225 x 295 x 60
Zulässige Umgebungstemperatur:	5°C bis 30°C
Gewicht:	2,55kg

Dimensions (mm)

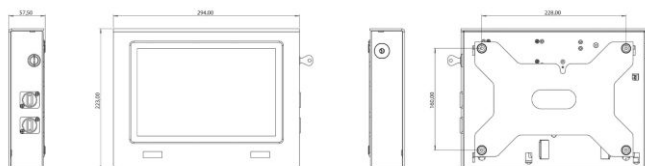


Tabela izdelkov

Opis	Šifra
WirelessControl prof. Linux centrala z zaslonom na dotik v ohišji z možnostjo zaklepanja, za stensko montažo, z USB koordinatorjem za WirelessControl profesionalno omrežje in naloženo NLWLZENT01 WL-programsko opremo za 250 svetilk	
Dodatna oprema	
Tipkovnica brezžična 2,4 GHz, s podlogo občutljivo na dotik doseg do 10m	Q7KEYBWL
USB 2.0 vozlišče, Smile, 4-vhodi, max. 480MBit, črno	Q7USB204