

Podatkovni list izdelka: NLZAA509CC

Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting

Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm




Tehnični podatki

neto dolžina (mm)	315,00
neto višina (mm)	140,00
neto globina (mm)	65,00
neto masa (kg)	2,20
vrsta svetilke	varnostna svetilka
z lastnim – centralnim napajanjem	svetilka s centralnim sistemom napajanja
funkcija	24V Core24 z nadzorom - centralno krmiljenje
izvedba	kovinska svetilka
oblika	ZA
barva	RAL 7016 (antracitno siva)
svetlobi vir	LED (2W)
lumen	220
območje napetosti (V)	24V AC


Tehnični podatki - Nadaljevanje

Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
stopnja mehanske zaščite	IP65
mehanska odpornost	IK08
montaža	stenska nadgradna
min. temperatura okolja (°C)	-30
maks. temperatura okolja (°C)	40
AA razred E 8101	AA3 AA4 AA5
proizvajalec	Schrack

Abmessungen (mm)

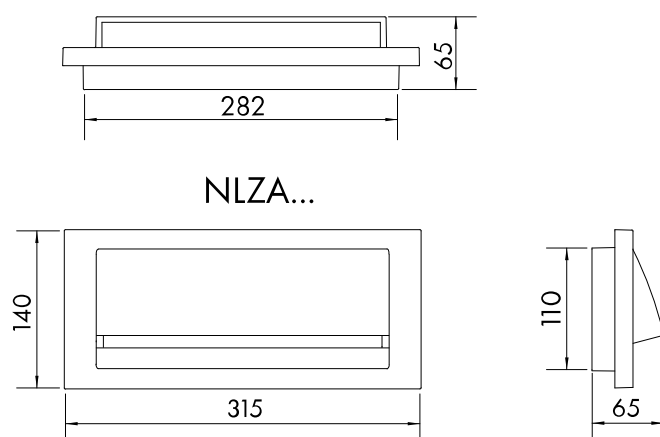

Bohrabstände (mm)

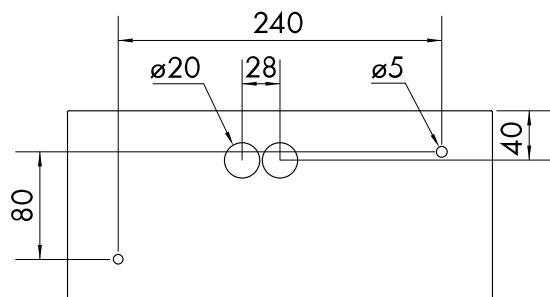

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	0,27	3,3	0,59	9,77	4,07
2,50	0,2	3,51	0,58	10,94	4,42
3,00	0,19	3,66	0,58	11,91	4,27
3,50	0,15	3,74	0,56	12,73	3,16
4,00	0,09	3,72	0,55	11,96	2,82

Opis	Šifra
Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm	NLZAA509CC