

Podatkovni list izdelka: WKA203008-

Ohišje sponk, jeklena pločevina, IP66, V=200 Š=300 G=80mm

RAL7035, s talnim profilom, hitro zapiralo na četrto obrato, brez montažne plošče



SCHRACK-Info

- Material: 1.2mm sheet steel (Finish: Textured powder coating)
- Body: Folded and seam-welded with four mounting holes in the rear panel and floor profiles for mounting DIN-rails or mounting plates
- Gasket: Extruded one-piece polyurethane gasket
- Earthing: Earthing stud M6x16mm in the cover. Contains M6 nuts and earth washers
- Supply includes: Base, cover, cover screws and floor profiles
- Optional accessories: Mounting plates WKAMPxxxx, DIN-rails WKADRxxxx and wall-mounting brackets WSAWB004
- Protection class: I
- Degree of protection: IP66
- Impact resistance: IK08
- Color: RAL 7035 (Light grey)



Tehnični podatki


neto širina (mm)	300,00
------------------	--------

Ustvarjeno na spletu dne 2026-06-23, Pridružimo si pravico do napak oz. do sprememb

Tehnični podatki - Nadaljevanje

neto višina (mm)	200,00
neto globina (mm)	80,00
neto masa (kg)	2,00
min. temperatura okolja (°C)	-10
maks. temperatura okolja (°C)	50
stopnja mehanske zaščite	IP66
zaščitni razred	I
mehanska odpornost	IK08
barva	RAL 7035 (svetlo siva)
toplotne izgube (W)	-28,00

Technical Details - Terminal Boxes WKA

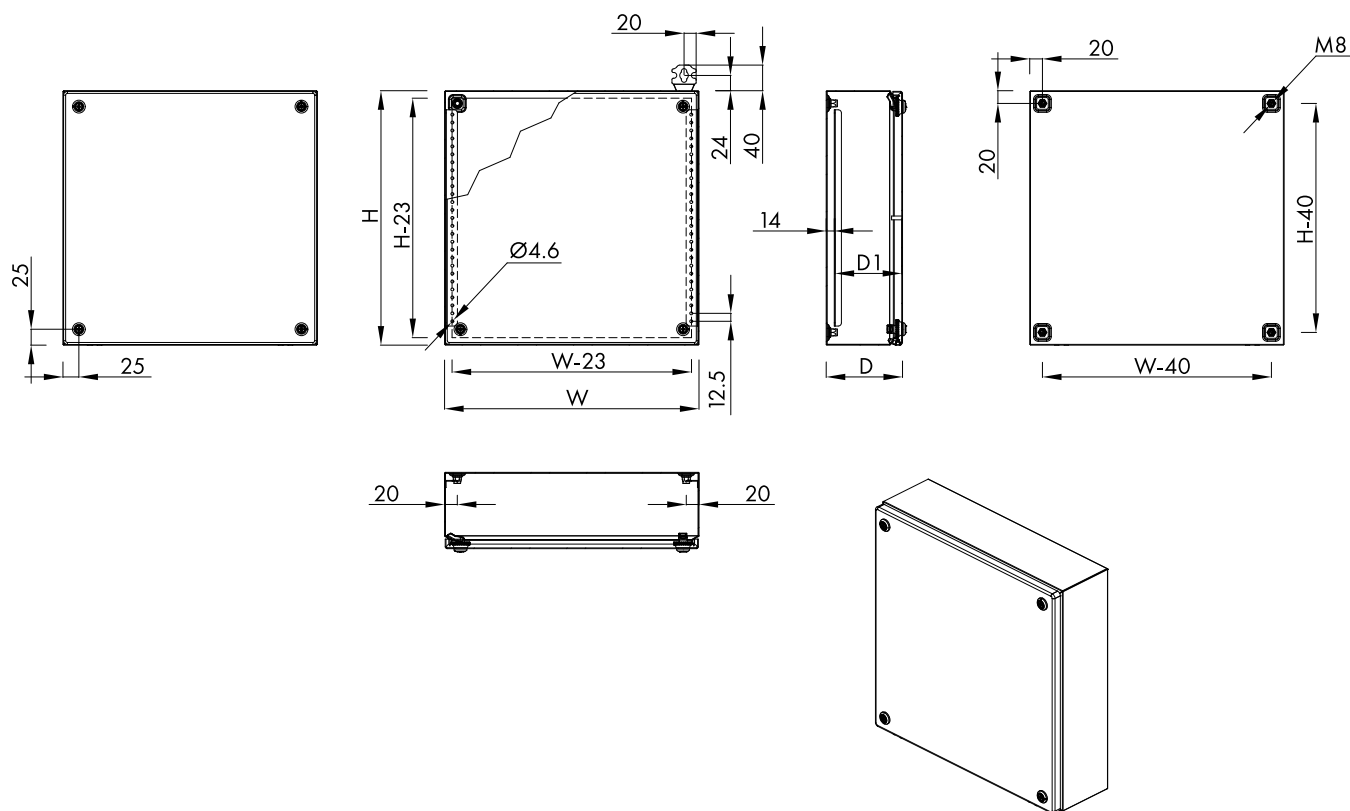

[mm]

Tabela datoteke: Ohišje sponk, jeklena pločevina, IP66, V=200 Š=300 G=80mm

Gehäuse (mm)				Gewicht (kg)	P _V (W)*	Montageplatten (mm)			DIN-Schienen (mm)		
Artikelnummer	H	B	T			Artikelnummer	Höhe	Breite	Artikelnummer	Höhe	Länge
WKA151508	150	150	80	1,00	-13	WKAMP1515	125	135	WKADR150	15	135
WKA152008	150	200	80	1,50	-17	WKAMP1520	125	185	WKADR200	15	185
WKA153008	150	300	80	1,50	-23	WKAMP1530	125	285	WKADR300	15	285
WKA202008	200	200	80	1,50	-21	WKAMP2020	175	185	WKADR200	15	185
WKA203008	200	300	80	2,00	-28	WKAMP2030	175	285	WKADR300	15	285
WKA204008	200	400	80	2,50	-36	WKAMP2040	175	385	WKADR400	15	385
WKA151512	150	150	120	1,00	-17	WKAMP1515	125	135	WKADR150	15	135
WKA152012	150	200	120	1,30	-21	WKAMP1520	125	185	WKADR200	15	185
WKA153012	150	300	120	2,50	-28	WKAMP1530	125	285	WKADR300	15	285
WKA154012	150	400	120	2,50	-35	WKAMP1540	125	385	WKADR400	15	385
WKA202012	200	200	120	2,00	-26	WKAMP2020	175	185	WKADR200	15	185
WKA203012	200	300	120	2,30	-34	WKAMP2030	175	285	WKADR300	15	285
WKA204012	200	400	120	3,00	-43	WKAMP2040	175	385	WKADR400	15	385
WKA205012	200	500	120	4,00	-51	WKAMP2050	175	485	WKADR500	15	485
WKA206012	200	600	120	5,00	-60	WKAMP2060	175	585	WKADR600	15	585
WKA208012	200	800	120	5,50	-77	WKAMP2080	175	785	WKADR800	15	785
WKA303012	300	300	120	3,50	-46	WKAMP3030	275	285	WKADR300	15	285
WKA304012	300	400	120	4,00	-58	WKAMP3040	275	385	WKADR400	15	385
WKA305012	300	500	120	5,00	-69	WKAMP3050	275	485	WKADR500	15	485
WKA306012	300	600	120	6,00	-80	WKAMP3060	275	585	WKADR600	15	585
WKA404012	400	400	120	5,50	-73	WKAMP4040	375	385	WKADR400	15	385
WKA406012	400	600	120	8,00	-101	WKAMP4060	375	585	WKADR600	15	585
WKA408012	400	800	120	9,15	-129	WKAMP4080	375	785	WKADR800	15	785

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandanbau und einem $\Delta T = 35K$.

Tabela izdelkov

Opis	Šifra
Ohišje sponk, jeklena pločevina, IP66, V=200 Š=300 G=80mm RAL7035, s talnim profilom, hitro zapiralo na četrt obrata, brez montažne plošče	WKA203008
dodatni pribor	
Nosilci, zidni, za omare WSA, WKT, WKA in ohišja BUS pocinkani, EE= 4 kosi	WSAWB004
Montažna plošča za WKA2030, V=200 Š=300mm galvanizirana jeklena pločevina	WKAMP2030
DIN-letve V=15mm za 300mm široko ohišje sponk EE=5 kosov, primerne za ohišje sponk WKA153008-, WKA153012-, WKA203008-, WKA203012- in WKA303012-	WKADR300