

Podatkovni list izdelka: WKA304015G

BUS-ohišje, IP66, okence, RAL7035, V=300 Š=400 G=155mm

jeklena pločevina, na tečajih, s talnim profilom, hitro zapiralo na četrto obrato, brez montažne plošče



SCHRACK-Info

- BUS-Enclosures in four different sizes, each available with or without glazed door
- Material: 1.2mm sheet steel (Finish: Textured powder coating)
- Body: Folded and seam-welded with four mounting holes in the rear panel and floor profiles for mounting DIN-rails or mounting plates
- Gasket: Extruded one-piece polyurethane gasket
- Earthing: Earthing stud M6x16mm in the cover. Contains M6 nuts and earth washers
- Supply includes: Base, hinged cover, cover screws and floor profiles
- Optional accessories: Mounting plates WKAMPxxxx, DIN-rails WKADRxxxx and wall-mounting brackets WSAWB004
- Protection class: I
- Degree of protection: IP66
- Impact resistance: IK08, IK06 with glazed door
- Color: RAL 7035 (Light grey)



Tehnični podatki

neto širina (mm)	400,00
neto višina (mm)	300,00
neto globina (mm)	155,00
neto masa (kg)	6,60
min. temperatura okolja (°C)	-10
maks. temperatura okolja (°C)	50
stopnja mehanske zaščite	IP66
zaščitni razred	I
mehanska odpornost	IK06
barva	RAL 7035 (svetlo siva)
toplotne izgube (W)	-65,00

Merska skica: BUS-ohišje, IP66, okence, RAL7035, V=300 Š=400 G=155mm

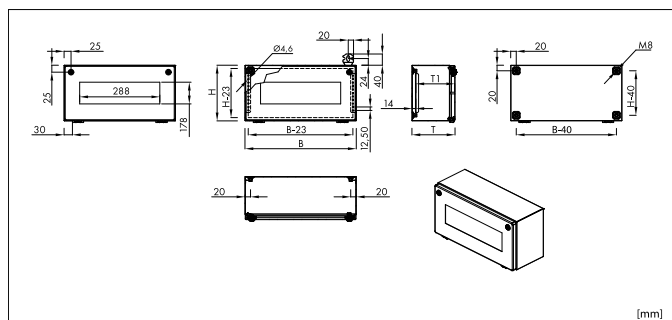


Tabela datoteke: BUS-ohišje, IP66, okence, RAL7035, V=300 Š=400 G=155mm

Artikelnummer	Gehäuse (mm)				Gewicht (kg)	P _v (W)*	Montageplatten (mm)			DIN-Schienen (mm)		
	H	B	T	Sichtfenster			Artikelnummer	Höhe	Breite	Artikelnummer	Höhe	Länge
WKA204015G	200	400	155	✓	5,00	-49	WKAMP2040	175	385	WKADR400	15	385
WKA304015G	300	400	155	✓	6,60	-65	WKAMP3040	275	385	WKADR400	15	385
WKA306015G	300	600	155	✓	9,12	-90	WKAMP3060	275	585	WKADR600	15	585
WKA308015G	300	800	155	✓	11,90	-114	WKAMP3080	275	785	WKADR800	15	785

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandanbau und einem $\Delta T = 35K$.

Tabela izdelkov

Opis	Šifra
BUS-ohišje, IP66, okence, RAL7035, V=300 Š=400 G=155mm jeklena pločevina, na tečajih, s talnim profilom, hitro zapiralo na četrt obrata, brez montažne plošče	WKA304015G
dodatni pribor	
Nosilci, zidni, za omare WSA, WKT, WKA in ohišja BUS pocinkani, EE= 4 kosi	WSAWB004
Montažna plošča za WKA3040, V=300 Š=400mm galvanizirana jeklena pločevina	WKAMP3040
DIN-letve V=15mm za 400mm široko ohišje sponk in BUS EE=5 kosov, primerne za ohišje sponk WKA154012-, WKA204008-, WKA204012-, WKA304012-, WKA404012- in BUS-ohišje WKADR400 WKA204015B, WKA204015G, WKA304015B, WKA304015G	